

Snap Lid System®

Quick Start-up Guide

1


Never take the valve locker off!

This unique system prevents a vacuum and guarantees a stable paint flow.



3

Install the Snap Lid System® adapter specific to your spray gun model with a Wrench #22. Keep the adapter installed on the spray gun.

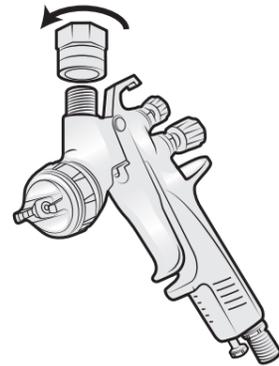


5

Attach lid to cup: starting at the side nearest the air-vent with the lid on an angle, push down with both thumbs and press down around the perimeter of the lid until the lid snaps securely onto the cup and a seal is achieved.



7


Rotate gun/cup assembly right side up and attach air hose.

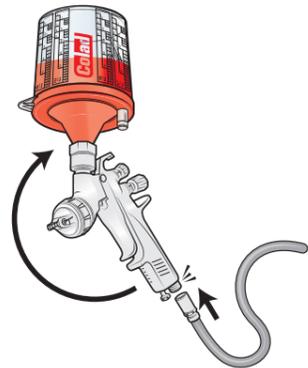

2


Never take out the filter!

The filter primarily prevents against pollution and particles out of the paint and makes sure you'll always have a consistent flow and no issues with sputtering output.

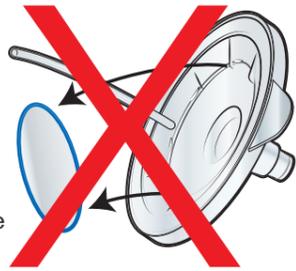

4

Mix paint in cup: Mixing, reducing and mechanical agitation can be done in the Snap Lid System® cup prior to the Snap Lid System® lid being snapped on.

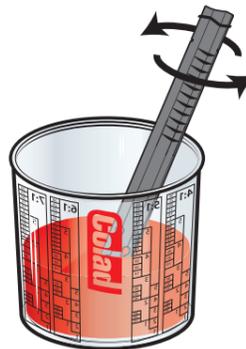

6

Attach the spray gun onto the lid by twisting the threads and tightening until secure.



8

Tilt the spray gun forward and backward to release any air below the filter.



Snap Lid System®

Quick Start-up Guide


9

Now begin spraying. The Snap Lid System® will spray just like a vented cup.



10

When finished with spraying, turn the cup upside down and pull the spray gun trigger to allow flow of product back into the cup from the gun. Remove Snap Lid System® and clean spray gun.

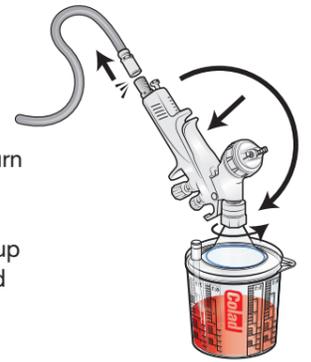

FOR REFILLS

Remove the spray gun. Pull up on the tab and unlock the seal in a circular motion to remove the lid. Refill the cup with paint and reseal the lid.




STORING UNUSED PAINT

The lid can be temporary sealed with the red Snap Lid® Sealing Caps. Also available are the black Snap Lid® Mixing Cup Lids, that can be used for longer storage and stack Snap Lid® cups containing unused paint.




FOUR FILTERS AVAILABLE

Suitable for all types of paint:
White - 90 micron - Clear coat
Blue - 130 micron - Waterborne base coat
Green - 190 micron - Conventional base coat
Red - 280 micron - Primer

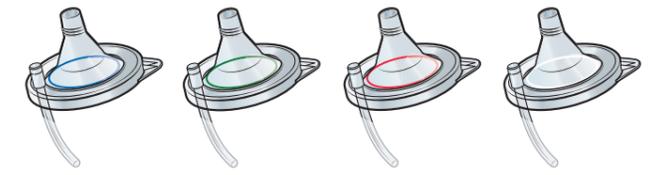

TURBOMIX™ PAINTSAVER™

Perfect consistency and pigment blend are crucial for a spotless end result. Mixing paint with the Turbomix Paintsaver® speeds up the process, reduces paint wastage and ensures a perfect result.

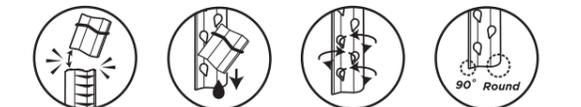

SAVE PAINT & USE EVERY LAST DROP

Our unique vented system gives you the ability to work neater and with a stable, consistent paint flow. Less paint is wasted, use less to create more!



THE MANUAL IN YOUR LANGUAGE?
SCAN THE QR-CODE!

