

Rafmagnsvörur 2024 Vörulisti



Aðvörunarljós
Afturljós

Rafhlöðuverkfæri
Raflagnahreinsir
Rafmagnsvír

Bakkflauta

Rafmagnsmælir
Rafmagnsspil 12V
Rafmagnstalía

Bilanagreinir
Bílalyftur
Brýni Fjölnota
Einangrunarlímbönd

Rafmagnsverkfæri

Ennisljós
Fjöltengi 230V

Rafmótor

Flautur
Gaumljós
Gleröryggi
Glitmerki
Handljós
Herpihólkar
Hitabyssa
Hitalampi
Hjámiðjurokkur

Rafsuðuvél
Realy
Realysökkklar
Rofar
Rúðusprautu dælur 12V
Samtengi
Sandblástursskápar
Slípirokkur
Smergel
Startkaplar
Starttæki
Stofnöryggi
Súluborvél
Tengjateikning af 7 og 13 póla tengi
Tengibox

Hliðarljós
Hnoðbyssa
Höggborvél
Höfuðrofar

Tengibox

Inniljós
Kapalbönd
Kapalhjól
Kapalskór

Tengibretti

Kerrutengi
Leiðsluskór
Límbyssa

Vasaljós

Loftdæla
Loftpressa
Lóðboltar

Vinnuljós

Ljósabretti
Ljósaperur
Ljóskastari

Víra og skóatangir
Víratálía
Víratengi

Massavél
Perur
Peruskápar
Perustæði

Víratengjasett

Póliskór
Prufulampi
Rafeinagrun

Vírbindi
Þvottakar
Öryggi

Rafgeymar
Rafgeymavörn
Rafhlöður


Öryggjahús

Öryggjasett


Öryggjatöng



Bílaperur


**BOSCH****FRAMLIÓS****H1 PERUR****H1 PERUR Á SPJALDI**



093 3021	12V	55W	P14,5s
H1 Pessi venjulega			
093 3021333	12V	55W	P14,5s
H1 Megablue			
093 3021300	12V	55W	P14,5s
H1 Ultra White 4200°K + 30%			
093 3021900	12V	55W	P14,5s
H1 Ultra + 90%			
093 3021180	12V	55W	P14,5s
H1 Ultra + 90% Twinbox			
093 3021335	12V	70W	P14,5s
H1 4300°K Silverblue			
093 3024	24V	70W	P14,5s
H1 Pessi venjulega			
093 302499	24V	70W	P14,5s
H1 HD			
093 13024	24V	100W	P14,5s
H1 Rally			






093 3021130	12V	55W	P14,5s
H1 ULTRA + 130%			
093 93021	12V	55W	P14,5s
H1 Pessi venjulega			
093 93021900	12V	55W	P14,5s
H1 Ultra + 90%			

H2 PERUR




093 3420	12V	55W	X511
55W Pessi venjulega			
093 13420	12V	100W	X511
100W Rally			
093 3720	24V	70W	X511
70W Pessi venjulega			

FRAMLIÓS**H3 PERUR****H3 PERUR Á SPJALDI**


093 3320	12V	55W	PK22s
H3 Pessi venjulega			
093 3320333	12V	55W	PK22s
H3 Megablue			
093 3320900	12V	55w	PK22s
H3 Ultra + 90%			
093 3324	24V	100W	PK22s
H3 Pessi venjulega			



093 93320	12V	55W	PK22s
H3 Pessi venjulega			
093 13324	24V	100W	PK22s
H3 Rally			

FRAMLIÓS**H4 PERUR****H4 PERUR Á SPJALDI**



093 625543	12V	60/55W	P43t
H4 Pessi venjulega			
093 625522	12V	60/55W	P43t
H4 Longlife			
093 6255333	12V	60/55W	P43t
H4 Megablue			
093 6230043	12V	60/55W	P43t
H4 Ultra white 4200°k + 30%			
093 6255600	12V	60/55W	P43t
H4 Ultra white 4200°k twinbox			
093 6289043	12V	60/55W	P43t
H4 Megaplux 50%			
093 6290043	12V	60/55W	P43t
H4 Ultra + 90%			
093 6213043	12V	60/55W	P43t
H4 Ultra + 130%			
093 525543	12V	100/55W	P43t
H4 Rally			
093 7255335	12V	100/90W	P43t
H4 Silverblue			









093 9625543	12V	60/55W	P43t
H4 Pessi venjulega			
093 9725543	12V	100/90W	P43t
H4 Rally			
093 96290043	12V	60/55W	P43t
H4 Ultra +90%			

FRAMLIJÓŠ

H4 PERUR

H4 PERUR


	093 825522 24V 75/70W P43t H4 VR LL Vibration Resistant & Longlife
	093 825543 24V 75/70W P43t H4 Þessi venjulega
	093 8290043 24V 100/90W P43t H4 Rally


	093 625545 12V 60/55W P45t H4 Hringlött gamla gerðin.
	093 825545 24V 75/70W P45t H4 Hringlött gamla gerðin.
	093 8213043 24V 130/90W P43t H4 Super Rally

FRAMLIJÓŠ

H7 PERUR

H7 PERUR Á SPJALDI

	093 2070 12V 55W PX26d H7 Þessi venjulega
	093 207022 12V 55W PX26d H7 Longlife
	093 2070900 12V 55W PX26d H7 Ultra + 90%
	093 2070100 12V 55W PX26d H7 Ultra + 100%
	093 2070130 12V 55W PX26d H7 Ultra + 130%
	093 2070333 12V 55W PX26d H7 Megablue
	093 2070300 12V 55W PX26d H7 Ultra White 4200°K + 30 %
	093 12070 12V 80W PX26d H7 Rally
	093 2470 24V 70W PX26d H7 Þessi venjulega
	093 247022 24V 70W PX26d Longlife, Vibration Resistant




	093 92070 12V 55W PX26d H7 Þessi venjulega
	093 92070900 12V 55W PX26d H7 Ultra + 90%




FRAMLIJÓŠ

H8 - H9 - H10 PERUR


H11 - PERUR

	093 2080 12V 35W PGJ19-1 35W Þessi venjulega H8
	093 92080 12V 35W PGJ19-1 Þessi pera er í blister pakkingu
	093 2090 12V 65W PGJ19-5 65W Þessi venjulega H9
	093 9145 12V 42W PY20d 42W Þessi venjulega H10

	093 2110 12V 55W PGJ119-2 55W Þessi venjulega H11
	093 92110 12V 55W PGJ119-2 Þessi pera er í blister pakkingu
	093 2114 24V 70W PGJ119-2 70W Þessi venjulega H11


FRAMLIJÓŠ
H12 PERUR


093 9055 **12V** 53W PZ20d
53W Þessi venjulega H12


H13 PERUR


093 9008 **12V** 60/55W P26,4t
60/55W Þessi venjulega H13

093 9008333 **12V** 60/55W P26,4t
60/5W Blá

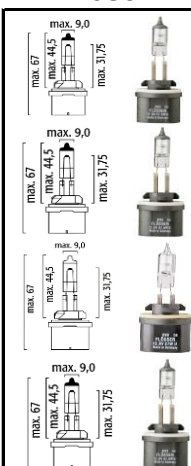
FRAMLIJÓŠ
H15 PERUR


093 551523 **12V** 55/15 PGJ23T-1
55/15W Þessi venjulega H15

H16 PERUR


093 191219 **12V** 19W PGJ19-3
19W H16 Longlife

1987302089 BOSCH Númer



FRAMLIJÓŠ
H27W/1 PERUR


093 880 **12V** 27W PG13
27W Þessi venjulega 9mm

093 893 **12V** 37,5W PG13
37,5W Þessi venjulega 9mm

093 890 **12V** 27W PG13
27W Þessi venjulega 9mm
Ekki með svartri hettu


093 885 **12V** 50W PG13
50W Þessi venjulega

H27W/2 PERUR


093 881 **12V** 27W PGJ13
27W Þessi venjulega 9mm

093 886 **12V** 50W PGJ13
50W Þessi venjulega 12,5mm

093 894 **12V** 37,5W PGJ13
37,5W Þessi venjulega 12,5mm


FRAMLIJÓŠ
HB1 PERUR


093 9004 **12V** 65/45W P29t
65/45W Þessi venjulega

093 9004333 **12V** 65/45W P29t
65/45W Blá


HB3A PERUR

093 9005XS **12V** 60W PX20D
60W Þessi venjulega

HB3 PERUR


093 9005 **12V** 60W P20d
60W Þessi venjulega

093 9005333 **12V** 60W P20d
60W Megablue

093 9005900 **12V** 60W P20d
60W ULTRA +90%

093 99005 **12V** 60W P20d
Þessi pera er í blisterpakkingu

FRAMLIJÓŠ
HB4 PERUR



093 9006 **12V** 51W P22d
51W Þessi venjulega

093 9006333 **12V** 51W P22d
51W Megablue

093 9006XS **12V** 51W P22d
51W Bein festing.

093 9006900 **12V** 51W P22d
Ultra + 90%

093 99006900 **12V** 51W P22d
Ultra + 90% blister pakking

HB5 PERUR


093 9007 **12V** 65/55W PX29t
65/55W Þessi venjulega

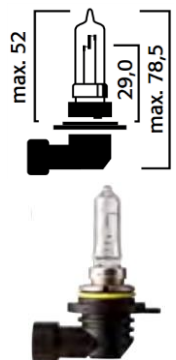
093 9007333 **12V** 65/55W PX29t
65/55W Blá

FRAMLIJÓŚ

HIR2 PERUR


R2 PERUR

093 9012 **12V** 55W PX22d
55W Þessi venjulega



max. 52
29,0
max. 78,5

093 3940 **12V** 45/40W P45t
45/40W Þessi venjulega



max. 41,0
nom. 28,5

093 3770 **24V** 55/50W P45t
55/50W Þessi venjulega

FRAMLIJÓŚ

P13


Kastarapera

FRAMLIJÓŚ

HS1


Fjórhjól

093 69672133 **12V** 13W PG18,5-d1
13W Kastarapera P13W



max 16,6
max 44
max 18,5

093 323543 **12V** 35/35W PX43t
35/35W Þessi venjulega



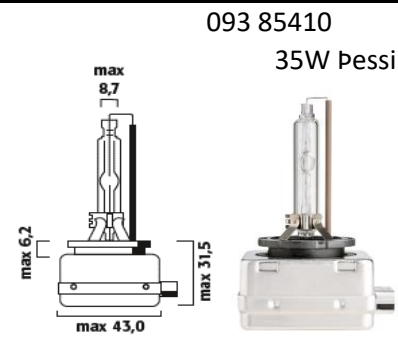
nom. 28,5
max. 92,0

FRAMLIJÓŚ

XENON D1S PERUR

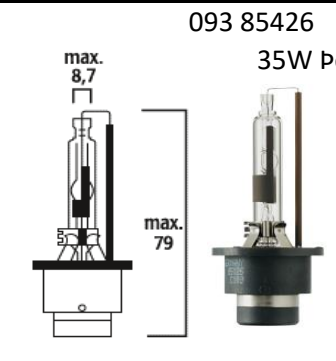
XENON D2R PERUR

093 85410 **85V** 35W Pk32d-2
35W Þessi venjulega 4200°K



max 8,7
max 6,2
max 31,5
max 43,0

093 85426 **85V** 35W P32d-3
35W Þessi venjulega 4200°K




max. 8,7
max. 79

FRAMLIJÓŚ

XENON D2S PERUR


XENON D3S PERUR

093 85422 **85V** 35W P32d-2
35W Þessi venjulega 4200°K



max 8,7
max 79

093 42322 **42V** 35W PK32d-5
35W Þessi venjulega



max. 8,0
max. 58,0
max. 83,0
max. 44,0

093 42422 **42V** 35W P32d-5
35W Þessi venjulega




max 8,7
max 79

FRAMLIJÓŚ

LÍTIL FRAMLIJÓŚAPERA

093 1251 **12V** 25/25W P15d-25-1
25/25W



max. 19
max. 67

Mótorhjólagera.

093 24540 **12V** 45/40W BA20d
45/40W





max. ø 36,0
max. 7,0
nom. 32,7

Tveggja póla pera.

1 PÓLA PERUR 6,8 mm

	093 4051 12V 2W BA7s
	2W Þessi venjulega
	093 4048 24V 3W BA7s
	3W Þessi venjulega

1 PÓLA PERUR 8,8 mm

	093 4038 12V 2W BA9s
	2W Þessi venjulega
	093 4008 24V 2W BA9s
	2W Þessi venjulega
	093 4088 12V 4W BA9s
	4W Þessi venjulega
	093 4080 24V 4W BA9s
	4W Þessi venjulega


1 PÓLA PERUR 8,8 mm

	093 94088 12V 4W BA9s
	4W Þessi venjulega á spjaldi
	2 stk


1 PÓLA PERUR 9mm

	093 4010 12V 10W BA9s
	10W Þessi venjulega
	093 6021 12V 21W BAY9s
	21W Þessi venjulega H21W


1 PÓLA PERUR 9mm

	093 4006 12V 6W BAX9s
	6W Þessi venjulega H6W

1 PÓLA PERUR 12,2mm

	093 795X 12V 50W BA15s
	50W Þessi venjulega halogen

1 PÓLA PERUR 19mm

	093 4025 12V 5W BA15s
	5W Þessi venjulega
	093 4052 24V 5W BA15s
	5W Þessi venjulega
	093 405299 24V 5W BA15s
	5W Heavy Duty


1 PÓLA PERUR Á SPJALDI

	093 94025 12V 5W BA15s
	5W Þessi venjulega
	2 stk

	093 14025 12V 10W BA15s
	10W Þessi venjulega R10W
	093 14052 24V 10W BA15s
	10W Þessi venjulega R10W
	093 1405299 24V 10W BA15s
	10W Heavy Duty R10W
	093 1402501 12V 10W BAU15s
	10W Gul á litinn Amber RY10W
	093 1402507 12V 10W BA15s
	10W Gul á litinn Amber


	093 914025 12V 10W BA15s
	10W Þessi venjulega R10W
	2 stk

1 PÓLA PERUR 25,5mm

	093 5671 12V 15W BA15s
	15W Þessi venjulega

1 PÓLA PERUR 26,5mm

1 PÓLA PERUR Á SPJALDI

	093 6671	12V	21W	BA15S
	P21W Þessi venjulega			
	093 6652	24V	21W	BA15S
	P21W Þessi venjulega			
	093 665299	24V	21W	BA15S
	P21W Heavy Duty			
	093 665207	24V	21W	BA15S
	P21W Amber Gul á litinn			
	093 667101	12V	21W	BAU15S
	PY21W Amber gul á litinn Misvísandi pinnar			
	093 667107	12V	21W	BA15S
	Amber gul á litinn Beinir pinnar			





093 96671	12V	21W	BA15S
P21W Þessi venjulega			
2 stk			




093 9667101	12V	21W	BAU15S
PY21W Amber gul á litinn			
2 stk Misvísandi pinnar.			


1 PÓLA PERUR 36mm

1 PÓLA PERUR 18,5mm

	093 3350	12V	50W	BA20s
	50W Þessi venjulega			
				



093 69668433	12V	24W	PG20/4
24W Amber gul á litinn			




093 69676933	12V	24W	PG20/7
24W			

1 PÓLA PERUR SKRÚFAÐAR 11,5mm

1 PÓLA PERUR SKRÚFAÐAR 11,5mm


	093 4045	12V	3W	E10
	3W Þessi venjulega			




093 4046	24V	3W	E10
3W Þessi venjulega			

2 PÓLA PERUR 19mm

2 PÓLA PERUR 26,5mm

	093 4452	24V	5W	BA15d
	5W Þessi venjulega			
	093 14425	12V	10W	BA15d
	10W Þessi venjulega			
	093 14452	24V	10W	BA15d
	10W Þessi venjulega			




093 5329	12V	21/4W	BAZ15d
P21/4W Þessi venjulega			
Misvísandi pinnar			

093 5339	24V	21/4W	BAZ15d
P21/4W Þessi venjulega			
Misvísandi pinnar			


2 PÓLA PERUR 26,5mm

2 PÓLA PERUR Á SPJALDI

	093 5229	12V	21/5W	BAY15d
	P21/5W Þessi venjulega			
	093 522907	12V	21/5W	BAY15d
	P21/5W Amber Gul á litinn			
	093 5239	24V	21/5W	BAY15d
	P21/5W Þessi venjulega			



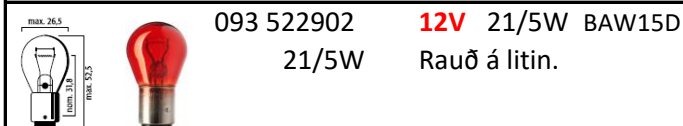
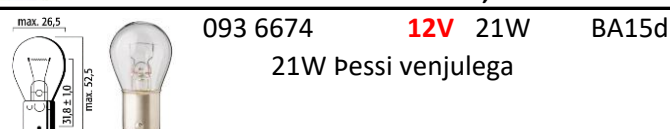
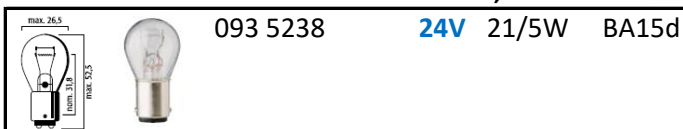
093 95229	12V	21/5W	BAY15d
P21/5W Þessi venjulega			
2 stk			



093 5228	6V	21/5W	BAY15d
P21/5W Þessi venjulega			

2 PÓLA PERUR 26,5mm

2 PÓLA PERUR 26,5mm

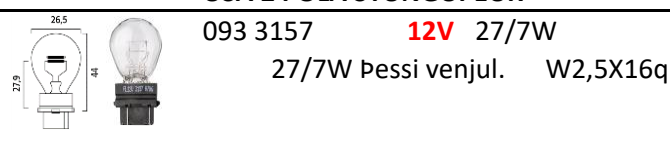
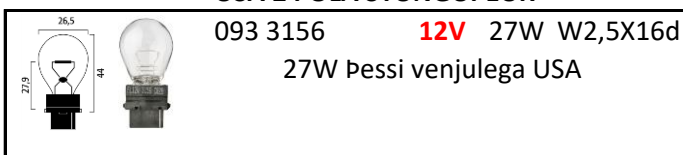


2 PÓLA PERUR 36,0mm

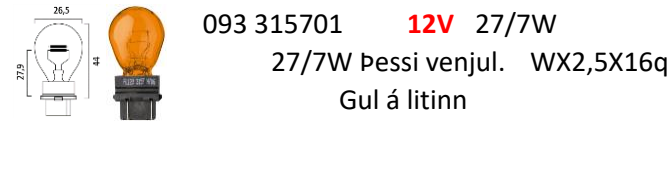
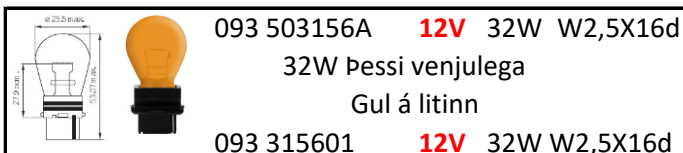


USA 2 PÓLA STUNGUPEUR


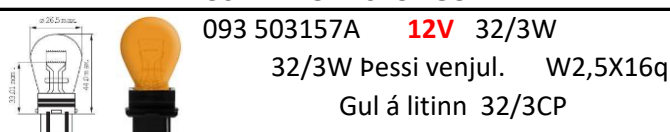
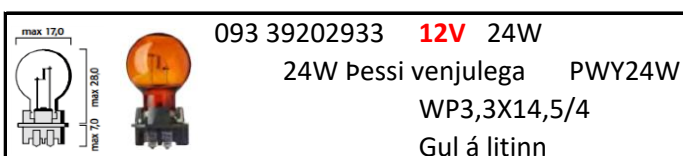
USA 2 PÓLA STUNGUPEUR



USA 1 PÓLA STUNGUPERA

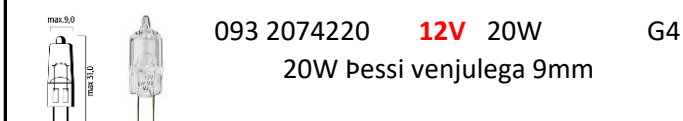
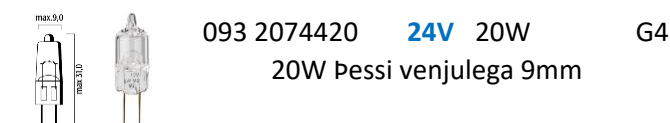
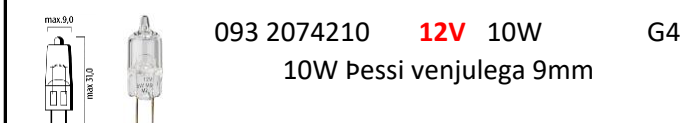
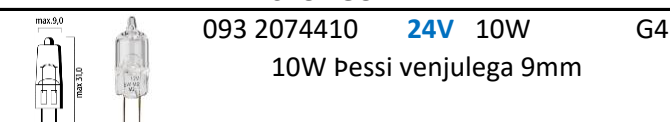
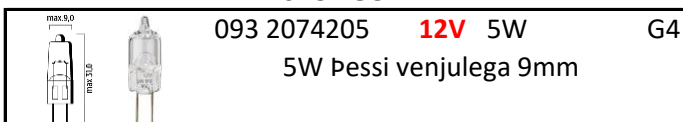


USA 2 PÓLA STUNGUPERA



STUNGUPERA 2PINNAR




STUNGUPERA 2PINNAR



Fleiri perugerðir eru fáanlegar en sýndar eru.

STUNGUPERA 5 mm

STUNGUPERA 5 mm

	093 4191 12V 1,2W W2x4,6d 1,2W Þessi venjulega T5
	093 419106 12V 1,2W W2x4,6d 1,2W Mött T5
	093 4391 12V 2W W2x4,6d 2W Þessi venjulega T5
	093 4192 24V 1,2W W2x4,6d 1,2W Þessi venjulega T5

	093 94191 12V 1,2W W2x4,6d 1,2W Þessi venjulega á spjaldi 2 stk
---	--

HETTUR FYRIR T5 PERUR



	093 60021 Hetta f/peru Blá
	093 60022 Hetta f/peru Græn
	093 60023 Hetta f/peru Rauð
	093 60024 Hetta f/peru Gul
	093 60025 Hetta f/peru Orange



STUNGUPERA 7 mm

	093 4591 12V 3W W2x4,6d 3W Þessi venjulega
---	--

STUNGUPERA 10,29 mm

STUNGUPERA 10,29 mm

	093 4290 12V 2W T10 2W Þessi venjulega W2,1x9,5d
	093 4090 12V 3W T10 3W Þessi venjulega W2,1x9,5d
	093 4092 24V 3W T10 3W Þessi venjulega W2,1x9,5d
	093 4291 12V 5W T10 5W Þessi venjulega W2,1x9,5d

	093 94291 12V 5W T10 5W Þessi venjulega W2,1x9,5d 2 stk
	093 4292 24V 5W T10 5W Þessi venjulega W2,1x9,5d
	093 429101 12W 5W T10 5W Þessi venjulega W2,1x9,5d Gul á litinn

HETTUR FYRIR T10 PERUR


HETTUR FYRIR T10 PERUR

	093 60001 Hetta f/peru blá		093 60004 Hetta f/peru Gul
	093 60002 Hetta f/peru græn		093 60005 Hetta f/peru Orange
	093 60003 Hetta f/peru rauð		

STUNGUPERA 13,5 mm


STUNGUPERA 15,7 mm


	093 4490 12V 10W 10W Þessi venjulega W2,1x9,5d
---	--

	093 921 12V 16W 16W Þessi venjulega W2,1x9,5d
	093 92107 12W 16W 16W Þessi venjulega Gul á lit

STUNGUPERA 20,5 mm


STUNGUPERA 20,5 mm


	093 2190 12V 21W 21W Þessi venjulega W3x16d
---	---

	093 219007 12V 21W 21W Þessi venjulega WX3x16d Gul á litinn
---	--

STUNGUPERA 20,5 mm 2.PÓLA


















STUNGUPERA 20,5 mm 2.PÓLA

	093 2690 12V 21/5W 21/5W Þessi venjulega W3x16Q
---	---

	093 269007 12V 21/5W 21/5W Þessi venjulega W3x16Q Gul á litinn
---	---

5 mm STUNGUPERA Í HÚSI

5 mm STUNGUPERA Í HÚSI

		093 419101 1,2W	12V 1,2W Svart hús	B8,5d			093 449101 1,2W	12V 1,2W Ljósblátt hús	BX8,5d
		093 459101 1,5W	12V 1,5W Gult hús	BX8,5d			093 439101 2W	12V 2W Grænt hús	B8,5d
		093 479101 2W	12V 2W Ljósgrænt hús	BX8,5d			093 419201 1,2W	24V 1,2W Grátt hús	B8,5d
		093 419102 1,2W	12V 1,2W Svart hús	B8,3d			093 439102 2W	12V 2W Hvítt hús	B8,3d
		093 449103 1,1W	12V 1,1W Appelsínugult hús	BX8,4d			093 419103 1,2W	12V 1,2W Svart hús	BX8,4d
		093 479103 1,3W	12V 1,3W Olívugrænt hús	BX8,4d			093 459103 1,5W	12V 1,5W Beige hús	BX8,4d
		093 439103 2W	12V 2W Grænt hús	BX8,4d					
		093 449105 1,4W	14V 1,4W Svart hús	HRQ			093 183385 1,8W	12V 1,8W Gænt hús	EBS R11
		093 501399 1,2W	24V 1,2W Svart hús Bosma				093 502494K 1,2W	24V 1,2W Brúnt hús Bosma	

PERUSETT

093 80200 PERUKASSI 12V. MÆLABÖRD




6924	10stk	459101	10stk
449103	10stk	459103	10stk
419101	10stk	183385	5stk
419102	10stk	439101	10stk
419103	10stk	439102	10stk
449101	10stk	439103	10stk
6925	10stk	479101	10stk
479103	10stk	409080	2stk
449105	5stk	4591	10stk



Fleiri perugerðir eru fáanlegar en sýndar eru.

PULSUPERA 6,2mm

	093 5148	12V	3W	SV5,5
	3W		6,2x28mm	
	093 5149	24V	3W	SV5,5
	3W		6,2x28mm	

PULSUPERA 8mm

	093 5159	24V	3W	SV7
	3W		8x28mm	

PULSUPERA 10mm

	093 5168	12V	10W	SV8,5
	10W		10x28mm	

PULSUPERA 11mm

	093 4033	12V	5W	SV8,5
	5W		11x35mm	
	093 4002	24V	5W	SV8,5
	5W		11x35mm	
	093 403310	12V	10W	SV8,5
	10W		11x35mm	
	093 400210	24V	10W	SV8,5
	10W		11x35mm	

PULSUPERA 11mm

	093 4230	12V	5W	SV8,5
	5W		11x40mm	
	093 4206	24V	5W	SV8,5
	5W		11x40mm	
	093 4231	12V	10W	SV8,5
	10W		11x40mm	
	093 94231	12V	10W	SV8,5
	10W		11x40mm	

2stk á Blister pakkingu.

PULSUPERA 15mm

	093 400418	12V	18W	SV8,5
	18W		15x41mm	
	093 4215	24V	15W	SV8,5
	15W		15x41mm	

SÉRHÆFD PULSUPERA 10mm

	093 561	12,8V	12CP	
	12CP		Rigid Loop	

LED PERUR 1 PÓLA

	093 914020	12-24V	BA15s	
	Hvítur litur		18x36mm	
	093 916670	12V	BA15s	
	Hvítur litur		26,5x50mm	

LED PERUR 1 PÓLA

	093 914028	12-24V	BA15s	
	Rauður litur		18x36mm	
	093 916677	12V	BA15s	
	Glær litur		26,5x50mm	


LED PERUR 2 PÓLA

	093 915220	12V	BAY15d	
	Hvítur litur		26,5x50mm	

LED PULSUPERA

	093 914030	12-24V	SV8,5	
	Hvítur litur		13,5x38mm	








LED STUNGUPERA

	093 914290	12-24V	W2,1x9,5d	
	Hvítur litur		W5W	

LED STUNGUPERA

	093 914293	12-24V	W2,1x9,5d	
	Blár litur		W5W	

Fleiri perugerðir eru fáanlegar en sýndar eru.

 PERUSTÆÐI H4 093 4444 Perustæði H4 Fyrir kapal 2,5mm²	 PERUSTÆÐI H4 093 4445 Perustæði H4 Með kapli
 PERUSTÆÐI H4 093 4446 Perustæði H4 Keramik með kapli	 PERUSTÆÐI H7 093 7444 Perustæði H7 Með kapli
 PERUSTÆÐI HB3, H10, H12, HIR1 093 9445 Perustæði HB3 Með kapli H10, H12, HIR1	 PERUSTÆÐI HB4, HIR2 093 9446 Perustæði HB4, HIR2 Með kapli
 PERUSTÆÐI H8, H9, H11 093 9448 Perustæði H8, H9 Með kapli H11	 PERUSTÆÐI BA15s 093 6444 Perustæði BA15s Með kapli
 PERUSTÆÐI BAY15d 093 6447 Perustæði BAY15d Járn hús	 PERUSTÆÐI BAY15d 093 5444 Perustæði BAY15d Með kapli
 PERUSTÆÐI HB1 093 9444 Perustæði HB1 Með kapli 2,5mm²	

PERUSKÁPUR FLÖSSER


093 18900 Peruskápur




Lítil skápur

SPÆÐAÖRYGGI 9,1MM

SPÆÐAÖRYGGI 9,1MM



093 502805	32V	Ljósbrúnt
32V	5 Amp	
093 502875	32V	Brúnt
32V	7,5 Amp	
093 502810	32V	Rautt
32V	10 Amp	
093 502815	32V	Ljósblátt
32V	15 Amp	




093 502820	32V	Gult
32V	20 Amp	
093 502825	32V	Hvítt
32V	25 Amp	
093 502830	32V	Grænt
32V	30 Amp	






JAPAN

SPÆÐAÖRYGGI 11 MM

SPÆÐAÖRYGGI 11MM



093 503802	58V	Grátt
58V	2 Amp	
093 503803	58V	Fjólublátt
58V	3 Amp	
093 503804	58V	Bleikt
58V	4 Amp	
093 503805	58V	Ljósbrúnt
58V	5 Amp	
093 503875	58V	Brúnt
58V	7,5 Amp	
093 503810	58V	Rautt
58V	10 Amp	
093 503815	58V	Ljósblátt
58V	15 Amp	
093 503820	58V	Gult
58V	20 Amp	
093 503825	58V	Hvítt
58V	25 Amp	
093 503830	58V	Grænt
58V	30 Amp	




093 6308 Öryggjahús
Japan





SPÆÐAÖRYGGI 11,5 MM

SPÆÐAÖRYGGI 11,5 MM



093 514802	32V	Grátt
32V	2 Amp	
093 514803	32V	Fjólublátt
32V	3 Amp	
093 514804	32V	Bleikt
32V	4 Amp	
093 514805	32V	Ljósbrúnt
32V	5 Amp	
093 514875	32V	Brúnt
32V	7,5 Amp	
093 514810	32V	Rautt
32V	10 Amp	
093 514815	32V	Ljósblátt
32V	15 Amp	
093 514820	32V	Gult
32V	20 Amp	
093 514825	32V	Hvítt
32V	25 Amp	
093 514830	32V	Grænn
32V	30 Amp	



093 6307 Öryggjahús



ÖRYGGJABOX

093 213020 Öryggjabox Japan
11mm
Japan 100stk



066 BCF100 Öryggjabox
11,5mm Mini 100stk




ÖRYGGJABOX


093 213010 Öryggjabox spaða
11,5 mm Mini 100stk





SPAÐAÖRYGGI 19MM



093 214801	32V	Svart
32V	1 Amp	
093 214802	32V	Grátt
32V	2 Amp	
093 214803	32V	Fjólublátt
32V	3 Amp	
093 214804	32V	Bleikt
32V	4 Amp	
093 214805	32V	Ljósbrúnt
32V	5 Amp	
093 214875	32V	Brúnn
32V	7,5 Amp	
093 214810	32V	Rautt
32V	10 Amp	
093 214815	32V	Ljósblátt
32V	15 Amp	
093 214820	32V	Gult
32V	20 Amp	
093 214825	32V	Hvítt
32V	25 Amp	
093 214830	32V	Ljósgrænt
32V	30 Amp	
093 214840	32V	Orange
32V	40 Amp	



SPAÐAÖRYGGI 19MM



093 6306 Öryggjahús



066 BCF120 Öryggjabox 19mm
120stk



ÖRYGGJASETT BLANDAÐ

093 213050 Öryggjasett blandað 140stk



Öryggi 11,5mm		
514875	7,5A	10stk
514810	10A	10stk
514815	15A	10stk
514820	20A	10stk
514825	25A	10stk
514830	30A	10stk



Öryggi 30mm

314820	20A	2stk
314830	30A	2stk
314840	40A	2stk



Öryggi 19mm

214805	5A	10stk
214875	7,5A	10stk
214810	10A	10stk
214815	15A	10stk
214820	20A	10stk
214825	25A	10stk
214830	30A	10stk



Öryggi 30mm

314850	50A	2stk
314860	60A	2stk

ÖRYGGJASETT 19MM

093 213040 Öryggjasett 19mm 110stk



214801	1A	5stk	214815	15A	10stk
214802	2A	5stk	214820	20A	10stk
214803	3A	10stk	214825	25A	10stk
214804	4A	10stk	214830	30A	10stk
214805	5A	10stk	214840	40A	10stk
214875	7,5A	10stk	16552		1stk
214810	10A	10stk			



SPAÐAÖRYGGI 30MM

SPAÐAÖRYGGI 30MM SETT



093 314820	32V	Gult
32V	20 Amp	
093 314825	32V	Grátt
32V	25 Amp	
093 314830	32V	Grænt
32V	30 Amp	
093 314840	32V	Orange
32V	40 Amp	
093 314850	32V	Rautt
32V	50 Amp	
093 314860	32V	Ljósblátt
32V	60 Amp	
093 314870	32V	Brúnn
32V	70 Amp	
093 314880	32V	Hvítt
32V	80 Amp	
093 3148100	32V	Fjólublátt
32V	100 Amp	




066 BCF36 Öryggjabox Sett
Maxi 36stk



093 324800 Öryggjahús f/ Maxi



093 324822 Hlíf yfir Öryggjahús



093 324844 Öryggjahús með hlíf



093 213070 Öryggjabox blandað 446 stk



Öryggi 11mm Japan

503802	2A	5stk
503803	3A	5stk
503804	4A	5stk
503805	5A	10stk
503875	7,5A	15stk
503810	10A	20stk
503815	15A	20stk
503820	20A	20stk
503825	25A	15stk
503830	30A	15stk



Öryggi 11,5mm

514803	3A	5stk
514805	5A	5stk
514875	7,5A	5stk
514810	10A	20stk
514815	15A	20stk
514820	20A	20stk
514825	25A	15stk
514830	30A	20stk

Öryggi 19mm

214805	5A	10stk
214875	7,5A	10stk
214810	10A	30stk
214815	15A	30stk
214820	20A	20stk
214825	25A	20stk
214830	30A	20stk
214840	40A	5stk




Öryggi 30mm


314820	20A	8stk
314830	30A	8stk
314840	40A	8stk
314850	50A	8stk
314860	60A	8stk
314870	70A	8stk
314880	80A	8stk
3148100	100A	5stk




ÖRYGGI 14MM - TYPE J

	093 609020	32V	Blátt
	32V	20 Amp	
	093 609025	32V	Ljós grátt
	32V	25 Amp	
	093 609030	32V	Bleikt
	32V	30 Amp	
	093 609040	32V	Grænt
	32V	40 Amp	
	093 609050	32V	Rautt
	32V	50 Amp	
	093 609060	32V	Gult
	32V	60 Amp	



ÖRYGGI 20MM - TYPE E

	093 609545	32V	Rautt
	32V	45 Amp	
	093 609565	32V	Svart
	32V	65 Amp	
	093 609575	32V	Grátt
	32V	75 Amp	


ÖRYGGI AFLÖNG - TYPE C

	093 607030	32V	Bleikt
	32V	30 Amp	
	093 607040	32V	Gænt
	32V	40 Amp	
	093 607050	32V	Rautt
	32V	50 Amp	
	093 607060	32V	Gult
	32V	60 Amp	
	093 607080	32V	Svart
	32V	80 Amp	
	093 6070100	32V	Blátt
	32V	100 Amp	
	093 6070120	32V	Hvítt
	32V	120 Amp	


STOFNÖRYGGI

	093 7048030	58V	Orange
	58V	30 Amp	
	093 7048040	58V	Grænt
	58V	40 Amp	
	093 7048050	58V	Rautt
	58V	50 Amp	
	093 7048060	58V	Gult
	58V	60 Amp	
	093 7048070	58V	Brúnt
	58V	70 Amp	
	093 8048080	32V	Rautt
	32V	80 Amp	
	093 8048100	32V	Gult
	32V	100 Amp	



ÖRYGGI 22MM - TYPE B

	093 604830	32V	Bleikt
	32V	30 Amp	
	093 604840	32V	Grænt
	32V	40 Amp	
	093 604850	32V	Rautt
	32V	50 Amp	
	093 604860	32V	Gult
	32V	60 Amp	
	093 604870	32V	Brúnt
	32V	70 Amp	
	093 604880	32V	Svart
	32V	80 Amp	
	093 604900	32V	Blátt
	32V	100 Amp	
	093 604920	32V	Hvítt
	32V	120 Amp	

ÖRYGGI 22MM - TYPE AS

	093 605020	32V	Blátt
	32V	20 Amp	
	093 605030	32V	Bleikt
	32V	30 Amp	
	093 605040	32V	Grænt
	32V	40 Amp	
	093 605050	32V	Rautt
	32V	50 Amp	
	093 605060	32V	Gult
	32V	60 Amp	

STOFNÖRYGGI

	093 7048080	58V	Hvítt
	58V	80 Amp	
	093 7048100	58V	Blátt
	58V	100 Amp	
	093 7048150	58V	Grátt
	58V	150 Amp	
	093 724800	Öryggjahús fyrir 7048 línuna	
	093 8048150	32V	Orange
	32V	150 Amp	
	093 8048300	32V	Grátt
	32V	300 Amp	

ÖRYGGJAHÚS

ÖRYGGJAHÚS



482 307024-S Öryggjahús 4 stykkja
Fyrir 19mm spaðaöryggi



482 307026-S Öryggjahús 6 stykkja
Fyrir 19mm spaðaöryggi




482 307028-S Öryggjahús 8 stykkja
Fyrir 19mm spaðaöryggi



GLERÖRYGGI 5mm

GLERÖRYGGI 5mm



093 1014005	32V	5x20mm
32V	0,5 Amp	
093 1014010	32V	5x20mm
32V	1 Amp	
093 1014012	32V	5x20mm
32V	1,25 Amp	
093 1014016	32V	5x20mm
32V	1,6 Amp	
093 1014020	32V	5x20mm
32V	2 Amp	
093 1014025	32V	5x20mm
32V	2,5 Amp	




093 1014031	32V	5x20mm
32V	3,15 Amp	
093 1014040	32V	5x20mm
32V	4 Amp	
093 1014050	32V	5x20mm
32V	5 Amp	
093 1014063	32V	5x20mm
32V	6,3 Amp	
093 1014100	32V	5x20mm
32V	10 Amp	



GLERÖRYGGI 6,3mm

GLERÖRYGGI 6,3mm



093 3201	32V	6,3X32mm
32V	1 Amp	
093 830105	32V	6,3X32mm
32V	2,5 Amp	
093 3203	32V	6,3X32mm
32V	3 Amp	
093 3204	32V	6,3X32mm
32V	4 Amp	
093 3205	32V	6,3X32mm
32V	5 Amp	
093 3210	32V	6,3X32mm
32V	10 Amp	




093 3215	32V	6,3X32mm
32V	15 Amp	
093 3220	32V	6,3X32mm
32V	20 Amp	
093 3225	32V	6,3X32mm
32V	25 Amp	
093 3230	32V	6,3X32mm
32V	30 Amp	
093 3240	32V	6,3X32mm
32V	40 Amp	





KERAMIK ÖRYGGI


KERAMIK ÖRYGGI




093 114805	32V	Gult
32V	5 Amp	
093 124808	32V	Hvítt
32V	8 Amp	




093 114816	32V	Rautt
32V	16 Amp	
093 124825	32V	Blátt
36V	25 Amp	



STÓR ÖRYGGI



093 9048150	58V	
58V	150 Amp	



RELAY 4 PINNA

RELAY 4 PINNA

	093 2142 12V 30 Amp	
	093 4242 24V 20Amp	

	093 2248 12V 50 Amp	
	093 2270 12V 70 Amp	
	093 2275 24V 70 Amp	

RELAY 5 PINNA

RELAY SÖKKLAR

	093 2252 12V 30 Amp	
	093 2262 12V 20/30 Amp	
	093 2162 12V 20/30 Amp	
	093 4162 24V 10/20 Amp	

	093 1123 Relay sökkull "Mini"	
	093 2222 Relay sökkull	
	093 2268 12V 30/40 Amp	
	093 4254 24V 30 Amp	

ÖRYGGI FYRIR VÉLAR

ÖRYGGI FYRIR VÉLAR

	093 38040 Öryggi 32V 40 Amp	
	093 38050 Öryggi 32V 50 Amp	

	093 39040 Öryggi 32V 40 Amp	
	093 39050 Öryggi 32V 50 Amp	

FLAUTA 12V

FLAUTA 24V



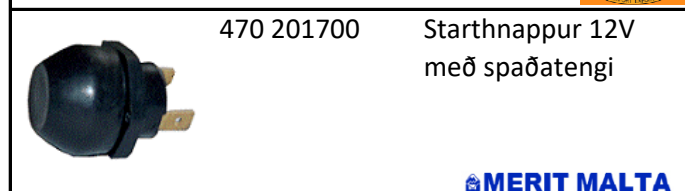
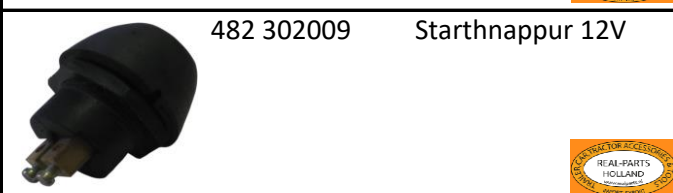
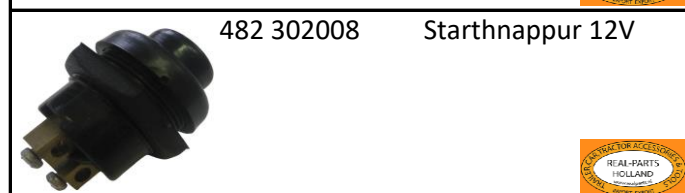
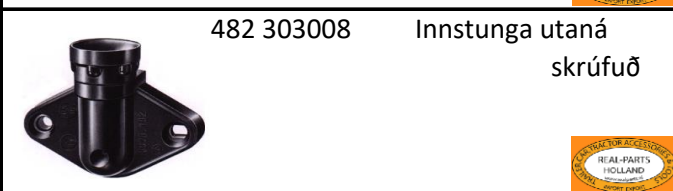
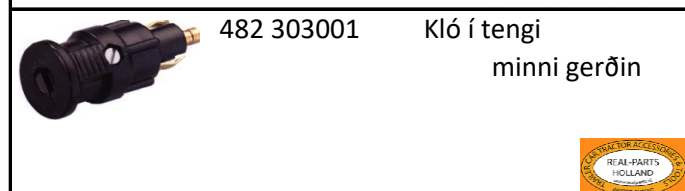
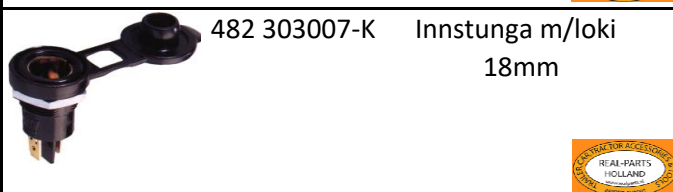
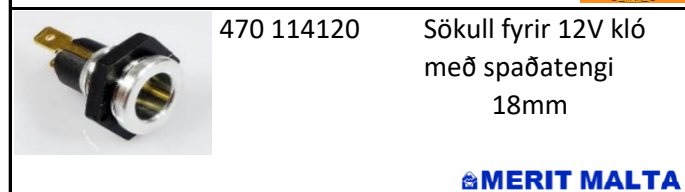
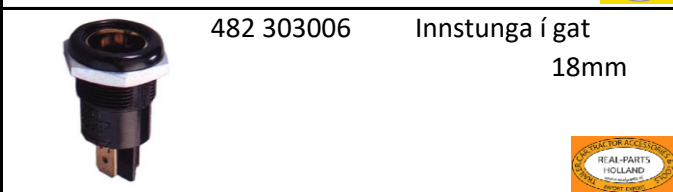
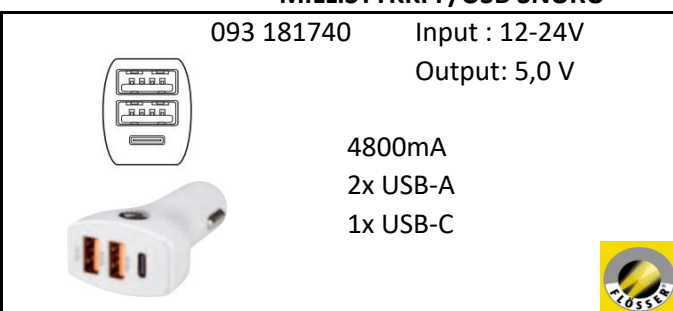
FLAUTA 12V

BAKKFLAUTA



KLÓ Í KVEIKJARA

MILLISTYKKI F/USB SNÚRU



GAUMLJÓS



482 302110 12V og 24V
Gaumljós Gult 12V Gat 17mm
12V pera BA9s 2W fylgir
(Pera 24V er 093 4080)



482 302111 12V og 24V
Gaumljós Grænt 12V Gat 17mm
12V pera BA9s 2W fylgir
(Pera 24V er 093 4080)



482 302112 12V og 24V
Gaumljós Blátt 12V Gat 17 mm
12V pera BA9s 2W fylgir
(Pera 24V er 093 4080)



482 302113 12V og 24V
Gaumljós Rautt 12V Gat 17 mm
12V pera BA9s 2W fylgir
(Pera 24V er 093 4080)



ROFAR



482 302101
Rofi Grænn Út/inn 12Volt



482 302102
Rofi Blár Út/Inn 12Volt



482 302103
Rofi Rauður Út/Inn 12Volt



482 302104
Rofi Gulur Út/Inn 12Volt



VELTIROFAR



482 302011
Rofi velti 19x13mm On/Off



482 302012
Rofi velti svartur 20mm



482 302010 Rofi m/toggormi
og krók



470 210720 Rofi útdreginn 12V
með spaðatengi

MERIT MALTA



470 206520 Hurðarofi 12V
með spaðatengi

MERIT MALTA



066 BT98/11 Ampermælir 0-75AH

SEALEY



VELTIROFAR



482 302012-B
Rofi Blár velti 20mm



482 302012-G
Rofi Grænn velti 20mm



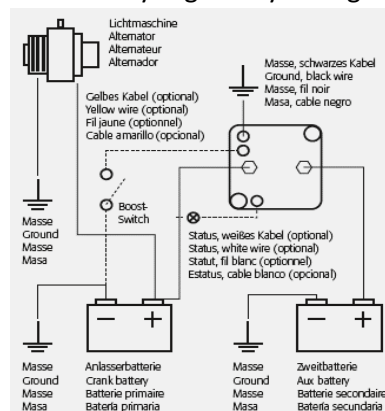
482 302012-O
Rofi Gulur velti 20mm



482 302012-R
Rofi Rauður velti 20mm



093 9458 Fyrir rafgeyma
Hleðslustýring 12V fyrir rafg.



	470 216001	Rofi "on/off" stuttur með spaðatengi		482 302001 20A	Rofi "on/off" með spaðatengi
				Fyrir 12mm gat.	
	482 302003 20A	Rofi "on/off/on" með spaðatengi		482 302119	Rofi "on/off" fyrir skó með gati
	Fyrir 12mm gat.			Fyrir 12mm gat.	
	482 302001-B	Rofi "on/off" blár með spaðatengi		482 302001-G	Rofi "on/off" grænn með spaðatengi
	Fyrir 12mm gat.			Fyrir 12mm gat.	
	482 302001-0	Rofi "on/off" orange með spaðaengi		482 302001-R	Rofi "on/off" rauður með spaðatengi
	Fyrir 12mm gat.			Fyrir 12mm gat.	

	470 327550	Sviss M/starti 12V 0-1-2-Start 2 lyklar		482 302018	Sviss M.F.2 lyklar 0-1-2-3 0-1-2-3 2 lyklar
	Operating Temp -30C - +80C Storage Temp -40C - +90C Terminals DIN 46 244 - A6, 3 x 0.8				
	580 S41288	Sviss M/hitara MF/ IH * Massey Ferguson MF35, 100,135,165			
					

	470 328605	Höfuðrofi 400Ah 12V 25qm		470 328700	Höfuðrofi 2500Ah 24V
					

PRUFULAMPI

PERUPRUFARI



093 183044 Prufulampi 6V-24V
6V-24V
093 5149 Auka pera í prufara




093 183000 Peruprufari
Rotpfeil




482 402004 Prufulampi 6V-24V
6V-24V 110mm




066 AK4008 Leiðnimælir
6V-24V




066 CFT1 Öryggjaprufari




066 AK415 Leiðnimælir Led
3V-28V




066 AK2252 Afeinangrunartöng
1, 1.6, 2, 2.6, 3.2mm²
175mm




066 AK2266 Afeinangrunartöng
Víraklippur



066 AK7945 Verkfærasett
fyrir rafmagnsbíla
polir 1000V




066 AK7945 Verkfærasett
fyrir rafmagnsbíla
polir 1000V



RAFLAGNAHREINSIVÖRUR

RAFLAGNAHREINSIVÖRUR



048 090505 Raflagnahreinsir
Contact cleaner 500ml
Efnið er til hreinslunar á rafmangsnertum og tengjum ýmiskonar. Efnið heldur vel frá raka og drullu. Fyrir bifreiðar, mótórhjól og fl.



048 090108 Rafeinangrun
purkspray
Electro protect 500ml
Efnið er notað til að þurrka raflagnir. Smýgur vel inn í alla staði. Efnið heldur vætu og raka vel frá. Góð viðloðun, góð vörn.



048 090515 DPF Hreinsir 500ml
Skynjarahreinsir
Öflugur hreinsir fyrir sótagnasíur.



048 090516 EGR Hreinsir 500ml
Skynjarahreinsir
Efnið er fljótvirkt hreinsiefni fyrir útblástursloftunarloka, EGR loka.



048 090408 Rykhreinsir sprej
fyrir rafbúnað
500ml
Fjarlægir ryk og óhreinindi
Ekki eldfimt og notendavænt
Þrýstiloft í spreibrúsa



048 090103 Kapalvörn spray
500ml
Fælir frá mýs og önnur nagdýr sem vilja naga rafmagnsleiðslurnar.

Einangraðir leiðsluskór			Rauðir	Vírsverleiki 0,5 - 1,5mm ²	
	482 305001	Kapalskór rauður Gat 3mm		482 305004	Kapalskór rauður 066 RT11 Sívalur Hann 4mm
	482 305002	Kapalskór rauður 066 RT24 Gat 4mm		482 305005	Kapalskór rauður 066 RT23 Sívalur Hún 4mm
	482 305003	Kapalskór rauður 066 RT25 Gat 5mm		066 RT29	Kapalskór rauður 100stk í pk. Samtengi 4mm
	482 305015	Kapalskór rauður 066 RT26 Gat 6mm		482 305007	Kapalskór rauður 066 RT19 Hún 2,8mm
	482 305016	Kapalskór rauður 066 RT27 Gat 8mm		482 305008	Kapalskór rauður 066 RT20 Hún 4,8mm
	482 305017	Kapalskór rauður Gat 10mm		482 305009	Kapalskór rauður 066 RT21 Hún 6,3mm
	482 305021	Kapalskór rauður 066 RT13 Opinn 3mm		066 RT16	Kapalskór rauður Hún lokað 6,3mm
	482 305018	Kapalskór rauður 066 RT14 Opinn 4mm		482 305011	Kapalskór rauður 066 RT10 Hann 2,8mm
	482 305014	Kapalskór rauður 066 RT18 Pinni 1,9mm		482 305020	Kapalskór rauður Hann 4,8mm
	482 305030	Kapaltengi rauður Herpihólkur 4 mm		066 RT22	Kapalskór rauður Hann 6,3mm
	066 RTSPF25	Kapaltengi rauður 6,4mm Hún Herpihólkur		482 305013	Kapalskór rauður 066 RT17 Tvöfaldur 6,3mm
	066 RTSPM25	Kapalskór rauður 6,3mm Hann Herpihólkur		482 307050	Þjófategi rautt 066 QSPR 0,5-1,0mm
	066 RTSSB25	Samtengi 22-18 AWG Með lóðningu			

KRÓNUTENGI 12 STK LENGJUR

482 307040
Raftengi Svart Lengja 4mq



482 307042
Raftengi Svart Lengja 10mq




KRÓNUTENGI 12 STK LENGJUR

482 307041
Raftengi Svart Lengja 6mq



482 307047
Raftengi Hvít Lengja 10mq



Einangraðir leiðsluskór			Bláir	Vírsverleiki 1,5 - 2,5mm ²
	482 305101	Kapalskór blár Gat 3mm		482 305105 Kapalskór blár Sívalur Hann 4mm
	482 305102	Kapalskór blár 066 BT24 Gat 4mm		482 305106 Kapalskór blár 066 BT11 Sívalur Hann 5mm
	482 305103	Kapalskór blár 066 BT25 Gat 5mm		482 305107 Kapalskór blár Sívalur Hún 4mm
	482 350104	Kapalskór blár 066 BT26 Gat 6mm		482 305108 Kapalskór blár 066 BT22 Sívalur Hún 5mm
	482 305120	Kapalskór blár 066 BT27 Gat 8mm		066 BT12 Kapalskór blár Samtengi 4,5mm
	482 305127	Kapalskór blár 066 BT23 Gat 10,5mm		482 305113 Kapalskór blár 066 BT19 Hún 4,8mm
	482 305123	Kapalskór blár 066 BT13 Opinn 4mm		482 305115 Kapalskór blár 066 BT20 Hún 6,3mm
	482 305109	Kapalskór blár Opinn 4mm		482 305118 Kapalskór blár Hún 7,7mm
	482 305110	Kapalskór blár 066 BT14 Opinn 5mm		482 305129 Kapalskór blár 066 BT15 Hún lokuð 4,8mm
	482 305119	Kapalskór blár 564 Pinni 1,9mm		482 305116 Kapalskór blár 066 BT16 Hún lokuð 6,3mm
	482 305122	Kapalskór blár 621 066 BT18 Pinni 1,9mm		482 305126 Kapalskór blár Hann 4,8mm
	482 305130	Kapalskór blár Herpihólkur 5,8mm		482 305114 Kapalskór blár 066 BT21 Hann 6,3mm
	482 307051	Þjófateggi blátt 066 QSPB 1,5-2,5mm		066 BTSSB25 Samtengi með lóðningu blá
	482 305117	Kapalskór blár 066 BT17 Tvöfaldur 6,3mm		066 BTSPM25 Herpihólkur blár Hann 6,4mm 25stk

Einangraðir leiðsluskór			Gulir	Vírsverleiki 4,0 - 6,0mm ²
	482 305201	Kapalskór gulir Gat 4mm		482 305211 Kapalskór gulir 066 YT21 Sívalur Hann 5mm
	482 305222	Kapalskór gulir 066 YT18 Gat 5mm		482 305212 Kapalskór gulir Sívalur Hún 5mm
	482 305218	Kapalskór gulir 066 YT19 Gat 8mm		482 305213 Kapalskór gulir 066 YT10 Samtengi 5,5mm
	482 305204	Kapalskór gulir 066 YT20 Gat 8mm		482 305215 Kapalskór gulir 066 YT13 Hún 6,3mm
	482 305219	Kapalskór gulir 066 YT16 Gat 10mm		482 305216 Kapalskór gulir 066 YT14 Hún 9,5mm
	482 305205	Kapalskór gulir 066 YT17 Gat 13mm		066 YT11 Kapalskór gulir Hún lokuð 6,3mm
	482 305207	Kapalskór gulir Opinn 5mm		482 305214 Kapalskór gulir 066 YT15 Hann 6,3mm
	482 305208	Kapalskór gulir Opinn 6mm		066 YTSSB25 Samtengi með lóðningu gult
	482 305217	Kapalskór gulir 066 YT23 Pinni 2,9mm		482 305230 Kapalskór gulir Herpihólkur 6,8mm
	482 307052	Þjófateggi gult 4,0-6,0mm		066 WTSSB25 Samtengi með lóðningu hvít

Kapalskóasett

066 AB038MT Kapalskór Sett
Gul/rauð/blá 200stk



AB038MT
Blue; Bullet; Ø5mm (x10), Butt Connector; Ø4.5mm (x30), Easy-Entry Ring; Ø8.4mm (5/16") (x10), Female Socket; Ø5mm (x10), Fully Insulated Female; 6.3mm (x10), Push-On Female; 6.3mm (x10), Push-On Male; 6.3mm (x10), Red; Bullet; Ø4mm (x10), Butt Connector; Ø3.3mm (x20), Female Socket; Ø4mm (x10), Fully Insulated Female; 6.3mm (x10), Push-On Female; 2.8mm (x10), Push-On Male; 6.3mm (x10), Yellow; Butt Connector; Ø5.5mm (x20), Easy-Entry Ring; Ø6.4mm (1/4") (x10), Ø8.4mm (5/16") (x10)

SEALEY

Kapalskóasett

066 AB039RT Kapalskór Sett
Rauðir 260 stk



AB039RT
Bullet; Ø4mm (x30), Butt Connector; Ø3.3mm (x30), Easy-Entry Fork; Ø3.7mm (4BA) (x10), Ø5.3mm (2BA) (x10), Easy-Entry Pin; 12mm x Ø1.9mm (x10), Easy-Entry Ring; Ø5.3mm (2BA) (x10), Ø8.4mm (5/16") (x10), Female Socket; Ø4mm (x20), Fully Insulated Female; 4.7mm (x20), 6.3mm (x10), Piggy-Back; 6.3mm (x20), Push-On Female; 2.8mm (x20), 4.8mm (x20), 6.3mm (x20), Push-On Male; 6.3mm (x20)

SEALEY

066 AB040BT Kapalskór Sett
Bláir 280 stk



AB040BT
Bullet; Ø5mm (x35), Butt Connector; Ø4.5mm (x40), Easy-Entry Blade; 18mm x 2.3mm (x40), Easy-Entry Fork; Ø3.7mm (4BA) (x10), Ø5.3mm (2BA) (x10), Easy-Entry Pin; 12mm x Ø1.9mm (x10), Easy-Entry Ring; Ø4.3mm (4BA) (x10), Ø6.4mm (1/4") (x10), Ø10.5mm (3/8") (x10), Female Socket; Ø5mm (x35), Fully Insulated Female; 4.8mm (x10), 6.3mm (x10), Piggy-Back; 6.3mm (x20), Push-On Female; 4.8mm (x10), 6.3mm (x10), Push-On Male; 6.3mm (x10)

SEALEY

066 AB041YT Kapalskór Sett
Gulir 140 stk



AB041YT
Bullet; Ø5mm (x10), Butt Connector; Ø5.5mm (x20), Easy-Entry Pin; 14 x Ø2.9mm (x10), Easy-Entry Ring; Ø5.3mm (2BA) (x10), Ø6.4mm (1/4") (x10), Ø8.4mm (5/16") (x10), Ø10.5mm (3/8") (x10), Ø13mm (1/2") (x10), Female Socket; Ø5mm (x10), Fully Insulated Female; 6.3mm (x10), Push-On Female; 6.3mm (x10), 9.5mm (x10), Push-On Male; 6.3mm (x10)

SEALEY

066 AK386 Kapalskór Sett
+ Krumptöng



Ýmsar stærðir

SEALEY

066 AK385 Töng fyrir raftengi



SEALEY

066 AK3863 Krumputöng stór



SEALEY

066 S0536 Kapalskór Sett
+ töng
Ýmsar stærðir
200stk



SEALEY

066 AK3858COMBO
Krumptöng með kjömmum



SEALEY

066 VS920 Raftengjasett



VS920
Red Handled - Spring Loaded Tube; 3.3 x 28mm, Square Blade; 1.4 x 28mm, Flat Blade; 1.5 x 24.75mm, 2 x 23mm, Fork Blade; 8 x 24mm, Screwdriver; 3/16" x 1". Green Handled - Tube; 3.3 x 28mm, 4.3 x 13mm, 3.75 x 13mm, 3 x 13mm, Flat Twin Blade; 3mm, 1.6mm

SEALEY

030 4471250 Rafmagnstöng 10"



sonic
tools

066 VS9203 Verkfærasett
Til að losa raftengi



VS9203
BMW, Chrysler, Citroen, Fiat, Ford, Honda, Jaguar, Mazda, Mercedes, Mitsubishi, Porsche, Renault, Saab, Toyota, VAG, Vauxhall/Opel

SEALEY

066 SSCSET1 Tengjasett superseal
350stk



SEALEY

066 AK419 Afdráttarkló fyrir



SEALEY

RAFMAGNSVIR 1MM²

RAFMAGNSVIR 2MM²

	066 AC3220YE	Rafmagnsvír gulur	50m rúlla	1mm ²
	066 AC3220RE	Rafmagnsvír rauður	50m rúlla	1mm ²
	066 AC3220GR	Rafmagnsvír grænn	50m rúlla	1mm ²
	066 AC3220BU	Rafmagnsvír blár	50m rúlla	1mm ²
	066 AC3220BK	Rafmagnsvír svartur	50m rúlla	1mm ²
	066 AC3220WH	Rafmagnsvír hvítur	50m rúlla	1mm ²
	066 AC3220BN	Rafmagnsvír brúnn	50m rúlla	1mm ²

SEALEY

	066 AC2830YE	Rafmagnsvír gulur	50m rúlla	2mm ²
	066 AC2830RE	Rafmagnsvír rauður	50m rúlla	2mm ²
	066 AC2830GR	Rafmagnsvír grænn	50m rúlla	2mm ²
	066 AC2830BU	Rafmagnsvír blár	50m rúlla	2mm ²
	066 AC2830BK	Rafmagnsvír svartur	50m rúlla	2mm ²
	066 AC2830WH	Rafmagnsvír hvítur	50m rúlla	2mm ²
	066 AC2830BN	Rafmagnsvír brúnn	50m rúlla	2mm ²

SEALEY

	482 304013-H	Kapall 2x1,5qm	Flatur
		Tvíleiðari	Hv-sv
		50m rúlla	



	482 304014-H	Kapall 2x1,5qm	Rúnaður
		Tvíleiðari	Hv-sv
		50m rúlla	



	482 304015-H	Kapall 3x1,5qm	Rúnaður
		Þríleiðari	Hv-sv-blár
		50m rúlla	



	482 304016-H	Kapall 4x1,5 qm	Rúnaður
		Fjórleiðari	Hv-bl-br-rau
		50m rúlla	



	482 304017-H	Kapall 5x1,5 qm	Rúnaður
		Fimmleiðari	
		50m rúlla	



	482 304040	Gormasnúra 2 met.	
---	------------	-------------------	--



	482 304026	KAPALL 10qm SVARTUR	
---	------------	---------------------	--

	482 304005	Kerrukapall	
		7x0,75mm ²	
		Sjöleiðari.	
		50m rúlla	



	482 304029	KAPALL 25qm SVARTUR	
	482 304029-R	KAPALL 25qm RAUÐUR	

	482 304018-H	Kerrukapall	
		7x1,5mm ²	
		Sjöleiðari.	
		50m rúlla	



	482 304030	KAPALL 35qm SVARTUR	
	482 304031	KAPALL 35qm RAUÐUR	

	482 304045	Kerrukapall	
		4x2,5mm ² og 9x1,5mm ²	
		Prettán vírar	



	482 304032	KAPALL 50qm SVARTUR	
	482 304033	KAPALL 50qm RAUÐUR	



	030 4822401	Kapalhjól 18metrar	
		3 x 1,5mm ²	
		230V	

sonic
tools

	065 DEL 32520	Kapalhjól 17metrar	
		3 x 2,5mm ²	
		230V	

prevost

HERPIHÓLKAR

HERPIHÓLKAR



066 HST100BR Herpihólkar sett
Rauðir og svartir
95 stk
100mm



066 HST200MC Herpihólkar sett
Ýmsir litir 100 stk
200mm



KAPALBÖND SVÖRT

KAPALBÖND HVÍT



047 FS100AWC Kapalbönd
2,5x100 Svart 100 stk

047 FS135AWC Kapalbönd
2,5x135 Svart 100 stk

047 FS160AWC Kapalbönd
2,5x160 Svart 100 stk

047 FS200AWC Kapalbönd
2,5x200 Svart 100 stk



047 FS200BWC Kapalbönd
3,5x200 Svart 100 stk

047 FS200CWC Kapalbönd
4,5x200 Svart 100 stk

047 FS280CWC Kapalbönd
4,5x280 Svart 100 stk



047 FS360CWC Kapalbönd
4,5x360 Svart 100 stk

047 FS200DWC Kapalbönd
7,5x200 Svart 100 stk

047 FS360DWC Kapalbönd
7,5x360 Svart 100 stk



047 FS135AC Kapalbönd
2,5x135 Hvítt 100 stk

047 FS140BC Kapalbönd
3,5x140 Hvítt 100 stk

047 FS200AC Kapalbönd
2,5x200 Hvítt 100 stk

047 FS200BC Kapalbönd
3,5x200 Hvítt 100 stk

047 FS200CC Kapalbönd
4,5x200 Hvítt 100 stk

047 FS360CC Kapalbönd
4,5x360 Hvítt 100 stk

047 FS200DC Kapalbönd
7,5x200 Hvítt 100 stk



066 CT375 Kapalbönd
Model No: CT375
Sizes: 100 x 2.5, 150 x 3.6, 200 x 4.8mm
Colours: Black, Green, Red, Yellow, White
375 stk



EINANGRUNABAND

EINANGRUNARBAND



530 19MMB
EINANGRUNARBAND SVART



530 19MMBL
EINANGRUNARBAND BLÁTT



530 19MMBR
EINANGRUNARBAND BRÚNT



530 19MMG
EINANGRUNARBAND GRÆNT



530 19MMGL
EINANGRUNARBAND GLÆRT



530 19MMGR
EINANGRUNARBAND GRÁTT



530 19MMGBR
EINANGRUNARBLAÐ GULBRÚNT



530 19MMLB
EINANGRUNARB. LIÓS-BLÁTT



530 19MMLG
EINANGRUNARB. LIÓS-GRÆNT



530 19MMO
EINANGRUNARBAND ORANGE



530 19MMR
EINANGRUNARBAND RAUTT




530 19MMW
EINANGRUNARBAND HVÍTT



530 19MMY
EINANGRUNARBAND GULT



530 19MMP
EINANGRUNARBLAÐ PURPLE



066 HWTBY Viðvörunarteip
50mmx33 metrar
Gult og svart



066 HWTRW Viðvörunarteip
50mmx33 metrar
Rautt og hvítt



PÓLSKÓR + PLÚS

	482 507001-1	Pólskór plús	
	066 BTP1	Rafgeymaskór plús	
	066 BTN2 12V	Rafgeymaskór mínus 25mm ²	
	066 BTP21	Rafgeymaskór plús	
	066 BTN22 24V	Rafgeymaskór mínus 70mm ²	
	102 75-1010	Pólskór Universal Plús og mínus	
	Blisterpakking		

PÓLSKÓR - MÍNUS

	482 507002-1	Pólskór mínus	
	066 BTP3	Rafgeymaskór plús	
	066 BTN4 24V	Rafgeymaskór mínus 60mm ²	
	066 BTP25	Rafgeymaskór plús	
	066 BTN26 24V 10mm bolti	Rafgeymaskór mínus	
	066 AK417	Vírbursti fyrir Rafgeymaskó	

KAPALKLÆR

	482 507011	Krókódíla kjaftar 1 stk	
	482 507040	Kapalklar "par" X-Heavy Duty	
	482 507036	Startkapalkló Rauð 400 Amp	
	482 507037	Startkapalkló Svört 400 Amp	
	102 75-2070	STARTKAPPLAR 16FT(21qx 4,8m)	

KAPALKLÆR

	482 507012-K	Kapalklær sett Rauð og svört	
			
	482 507037	Startkapalkló Svört 400 Amp	
	102 75-2070	STARTKAPPLAR 16FT(21qx 4,8m)	

TÖNG FYRIR KAPALSKÓ

	482 305250	Töng fyrir kapalskó 9" H-Duty	
	066 AB016CT	Kapalskór stórir Sett 52 stk.	
	482 305325	Kapalskór 25mm ² Gat 10mm	
	066 AK422	Krumpuáhold fyrir kapalskó	

KAPALSKÓR

	066 LT108	Kapalskór 10mm ² 8mm gat	
	066 LT168	Kapalskór 16mm ² 8mm gat	
	066 LT256	Kapalskór 25mm ² 6mm gat	
	066 LT258	Kapalskór 25mm ² 8mm gat	
	066 LT358	Kapalskór 35mm ² 8mm gat	
	066 LT3510	Kapalskór 35mm ² 10mm gat	
	066 LT508	Kapalskór 50mm ² 8mm gat	
	066 LT5010	Kapalskór 50mm ² 10mm gat	
	066 LT7010	Kapalskór 70mm ² 10mm gat	
	066 LT7012	Kapalskór 70mm ² 12mm gat	

RAFMAGNSMÆLIR

066 MM20 Rafmagnsmælir

AC/DC



Model No:	MM20
Specification:	
AC Voltage (Accuracy):	200V/600V (±2%)
DC Voltage (Accuracy):	200mV (±0.5%), 2V (±0.8%), 20V (±0.8%), 200V (±0.8%), 600V (±0.8%)
AC Current (Accuracy):	No
DC Current (Accuracy):	2mA (±1%), 20mA (±1%), 200mA (±1.2%), 10A (±2%)
Resistance (Accuracy):	200Ω, 2kΩ, 20kΩ, 200kΩ (±0.8%), 2MΩ (±1.2%)
Capacitance (Accuracy):	No
Temperature (Accuracy):	Range: -40°C-1000°C, (±1% up to 400°C), (±2% over 400°C)
Frequency (Accuracy):	No
Duty Cycle:	No
Continuity Audible:	Yes
Diode Test:	Yes
Transistor Test:	Yes
High-Impact Rubber Case:	Yes
Digits x Height:	6 x 12mm
Low Battery Indicator:	Yes
Batteries (Supplied):	1 x 9V
Information:	Integral Stand
Size (L x W x D):	140 x 70 x 35mm
Weight:	260g
Conformity:	IEC 1010



RAFMAGNSMÆLIR

066 TA200

AC/DC



Model No:	TA200
Specification:	
Tach (rpm):	4/5/8Cyl 0-10000 (x10)rpm
Dwell:	4Cyl 0-90°, 6Cyl 0-90°, 8Cyl 0-45°
AC Voltage:	2V, 20V, 200V, 750V
DC Voltage:	200mV, 2V, 20V, 200V, 1000V
AC Current:	No
DC Current:	200mA, 10A
Capacitance:	No
Frequency:	No
Duty Cycle:	No
Pulse Width:	No
Resistance:	200Ω, 2kΩ, 20kΩ, 200kΩ, 2MΩ, 20MΩ
Continuity:	<30Ω
Temperature:	No
IR Temperature:	No
Diode Check:	Yes
Transistor Test:	No
Back Light:	No
Bar Graph Display:	No
Display Hold:	Yes
Auto-Ranging:	No
Inductive Coupler:	No
PC Interface:	No
Digits Height:	21mm
Auto Power Off:	No
Low Battery Indicator:	Yes
Batteries (Supplied):	9V (PP3)
H-Impact Case:	Yes
Size (L x W x D):	180 x 85 x 40mm
Weight:	353g



066 TA311 Ampertöng 40A/400A

28mm gat.



066 TA310 Ampertöng 20A/80A

12mm gat.



066 AK9999 Laser hallamál á þrífæti



066 TA112 Prófari fyrir rafrásir

TA112
LED Leads (x2), Back Probes (x4), Alligator Clips (x2), Standard Probes (x2), Connector/Cables (Piggy-Back) (x4), Spring Loaded Piercing Clip



066 TA111 Prófari fyrir rafrásir

TA111
Potentiometer; 5kΩ (x2), Alligator Clip (x2), Back Probe (x4), LED 2 Colour Strobes (x2), SRS Connector (x2), 1:2 Connector (x2), 1:1 Connector/Cables (Piggy-Back) (x4), Probe (x2), Round Terminals with Banana Socket; Male (x3)/Female (x3) - 1.5, 2, 3.5, 4mm, Flat Terminals with Banana Socket; Male (x3)/Female (x3) - 0.7, 0.8, 1.2, 2, 2.5, 3, 5, 6mm



066 TA125 Straummælir 80W

Model No:	TA125
Range:	0-80A - 0-48V
Accuracy:	± 2%
Fuse Type:	Mini, Standard, Maxi



066 TA130 Realay mælasett

Model No:	TA130
Dummy Relays:	7 Including 1 Universal Fly Lead
Terminal Configurations:	4, 5 Pin



482 507075 **Álagsmælir fyrir rafgeyma**




066 BT91/7 **Álagsmælir 6V-12V fyrir rafgeyma**




066 BT3000 **Rafgeymamælir Bluetooth**




Model No:	BT3000
Rated Battery Voltage:	6/12V
Charging System Capability:	12/24V
Rating Systems:	DIN, EN, IEC, SEA, CA/MCA
Test Range:	25-1300 CCA* DIN
	40-2100 CCA* EN
	30-1500 CCA* IEC
	40-2000 CCA* SEA
	50-2400 CA/MCA

*CCA - Cold Cranking Amps
Voltage Range: 1.5-32V
Wireless Connection Range: 10mtr
Operating System: (Apple) iOS 8.0 and later, Android OS 4.3 and later.
Note: n/a



066 BT2014 **Rafgeyma og Alternator prufari**



Með prentara




066 VS2072 **Minniskubbur fyrir Minniskóða**



Model No:	VS2072
Cable Length:	1.35mtr
Connection:	EOBD



066 BT105 **Mælitæki 12V**



Model No:	BT105
Rated Battery Voltage:	12V
Rating Systems:	CCA, BCI, CA, DIN, EN, GB, IEC, MCA, SAE
Test Ranges:	100-2000 CCA* CCA
	100-2000 CCA* BCI
	100-2000 CCA* CA
	100-1400 CCA* DIN
	100-2000 CCA* EN
	100-1400 CCA* GB
	100-1400 CCA* IEC
	100-2000 CCA* MCA
	100-2000 CCA* SAE
	By Battery Type JIS
Rated Battery Voltage:	12V
PC Compatibility:	Windows 7, 8, 10
Languages:	English, Danish, Norwegian, Polish, Romanian

*CCA - Cold Cranking Amps

Fyrir rafgeyma og rafala



066 VS0564 **Dekkjamælir digital**



Model No:	VS0564
Range:	0-25mm(0-1")
Resolution:	0.01mm(0.0005")
Accuracy:	±0.02mm(0.001")
Battery:	LR44 - 1.5V (supplied)



066 TA050 **Snúningshraðamælir**



Model No:	TA050
Measures:	Range/Units:
Rotation Speed - Contact:	2-20,000rpm
Rotation Speed - Non-contact:	2-99,999rpm
Total Revolutions:	1-99,999
Sampling Time:	0.5s @ >120rpm
Accuracy:	± (0.05% + 1 digit)
Surface Speed:	mtr/min, in/min, ft/min, yd/min
Distance:	mtr, in, ft, yd
Frequency:	Hz
Battery:	PP3
External Power:	6V DC



066 TSTPG11 **Dekkjaloftmælir**



Model No:	TSTPG11
Scale:	0.21-10.3bar(3-150psi, 0.21-10.5kg/cm², 21-1034kPa)
Resolution:	0.5psi
Accuracy:	±1psi
Pressure Units:	bar, psi, kg/cm², kPa
Tread Depth Range:	0-20mm
Battery:	2 x CR2032 3V (supplied)
Connector Length:	n/a
Operating Temperature:	null



066 RCD981 **Yfirálgsvörn 230V**



Model No:	RCD981
Voltage:	230V
Maximum Load:	3kW
Maximum Operating Current:	13A
Trip Speed:	30ms
Trip Current:	30mA





066 VS904 Hitamælibyssa 12:1

Model No:	VS904
Focal Ratio:	12:1
Temperature Range:	-50°C to +550°C (-58°F to +1022°F)
Accuracy:	-50°C to 0°C; ±3°C; 0°C to +550°C; ±1.5°C or ±1.5% whichever is greater



066 VS909 Vasahitamælis 9:1

Model No:	VS909
Focal Ratio:	9:1
Temperature Range:	-33°C to +500°C (-27°F to +932°F)
Accuracy:	±2.0%



066 VS027 Bremsuvökvamælir
Dot 3-4-5,1

Model No:	VS027
Moisture Content:	
Green:	<0.5%
Yellow:	0.5-3.5%
Red:	>3.5%



066 VS0271 Bremsuvökvamælir
Dot 3-4-5,1

Just 3% of moisture can lower the brake fluid boiling point by over 100°C. The best way to detect this small water content is to measure the boiling point of the fluid. The unit incorporates a heater element, LCD display and a power lead for use on 12V DC power supplies.



066 VS0274 Bremsuvökvamælir

- Integrated circuitry checks moisture content of fluid by measuring the electrical resistance and comparing it with acceptable limits.
- Easy calibration check using water.
- Five LED read-out.
- Just switch on and insert probe for immediate result.

AAA - Rafhlaða.



066 TA091 Lakkþykktarmælir

Svið 0-2mm

CR2032 Rafhlaða



066 AK414 Sýrumælir
fyrir rafgeyma



066 AK410 Sýrumælir
fyrir rafgeyma
6V, 12V, 24 V



RAFGEYMAR
RAFGEYMAR
S4 LÍNAN FRÁ BOSCH

	S4000 Rafgeymir 44Ah Hægri + 12V 420A L=175 B=175 H=190 10,64kg  BOSCH		S4001 Rafgeymir 44Ah Hægri + 12V 440A L=207 B=175 H=175 11,5kg  BOSCH
	S4002 Rafgeymir 52Ah Hægri + 12V 470A L=207 B=175 H=190 12,16KG  BOSCH		S4004 Rafgeymir 60Ah Hægri + 12V 540A L=242 B=175 H=175 13,59kg  BOSCH
	S4005 Rafgeymir 60Ah Hægri + 12V 540A L=242 B=175 H=190 14,69kg  BOSCH		S4006 Rafgeymir 60Ah Vinstri + 12V 540A L=242 B=175 H=190 14,28kg  BOSCH
	S4007 Rafgeymir 72Ah Hægri + 12V 680A L=278 B=175 H=175 16,7kg  BOSCH		S4008 Rafgeymir 74Ah Hægri + 12V 680A L=278 B=175 H=190 17,54kg  BOSCH
	S4009 Rafgeymir 74Ah Vinstri + 12V 680A L=278 B=175 H=190 17kg  BOSCH		S4010 Rafgeymir 80Ah Hægri + 12V 740Ah L=315 B=175 H=175 18,8kg  BOSCH
	S4018 Rafgeymir 40Ah Hægri + 12V 330A L=187 B=127 H=227 9,74kg  BOSCH		S4019 Rafgeymir 40Ah Vinstri + 12V 330Ah L=187 B=127 H=227 9,74Kg  BOSCH
	S4020 Rafgeymir 45Ah Hægri + 12V 330A L=238 B=129 H=227 11,43kg  BOSCH		S4021 Rafgeymir 45Ah Hægri + 12V 330A L=238 B=129 H=227 11,43kg  BOSCH
	S4022 Rafgeymir 45Ah Vinstri + 12V 330A L=238 B=129 H=227 11,43kg  BOSCH		S4023 Rafgeymir 45Ah Vinstri + 12V 330A L=238 B=129 H=227 11,43kg  BOSCH
	S4024 Rafgeymir 60Ah Hægri + 12V 540A L=232 B=173 H=225 14,11kg  BOSCH		S4025 Rafgeymir 60Ah Vinstri + 12V 540A L=232 B=173 H=225 14,11kg  BOSCH
	S4026 Rafgeymir 70Ah Hægri + 12V 630A L=260 B=175 H=220 16,24kg  BOSCH		S4027 Rafgeymir 70Ah Vinstri + 12V 630A L=260 B=175 H=220 16,24kg  BOSCH
	S4028 Rafgeymir 95Ah Hægri + 12V 830A L=306 B=173 H=225 20,23kg  BOSCH		S4029 Rafgeymir 95Ah Vinstri + 12V 830A L=306 B=173 H=225 20,23kg  BOSCH
	S4030 Rafgeymir 40Ah Hægri + 12V 330A L=187 B=140 H=227 9,74kg  BOSCH		

RAFGEYMAR
Start/Stop rafgeymar

	S4E05 Hægri + 12V L=242 B=175 H=190	Rafgeymir 60Ah 560A EFB 16,67kg BOSCH
	S4E08 Hægri + 12V L=278 B=175 H=190	Rafgeymir 70Ah 650A EFB 19,14kg BOSCH
	S4E40 Hægri + 12V L=232 B=173 H=225	Rafgeymir 65Ah 650A EFB 16,93kg BOSCH
	S4E42 Hægri + 12V L=303 B=173 H=225	Rafgeymir 85Ah 800A EFB 21,69kg BOSCH

RAFGEYMAR
Start/Stop rafgeymar

	S4E07 Hægri + 12V L=278 B=175 H=175	Rafgeymir 65Ah 650A EFB 18,63kg BOSCH
	S4E10 Hægri + 12V L=315 B=175 H=175	Rafgeymir 75Ah 730A EFB 21,19kg BOSCH
	S4E41 Hægri + 12V L=261 B=175 H=220	Rafgeymir 72Ah 760A EFB 19,55kg BOSCH
	EK151 Vinstri + 12V L=150 B=90 H=145	Rafgeymir 15Ah 200A 4,8kg EXIDE

SILVER
S5 LÍNAN FRÁ BOSCH
SILVER

	S5005 Hægri + 12V L=242 B=175 H=190	Rafgeymir 63Ah 610A 14,85kg BOSCH
	S5013 Hægri + 12V L=353 B=175 H=190	Rafgeymir 100Ah 830A 21,71kg BOSCH
	S5011 Hægri + 12V L=315 B=175 H=190	Rafgeymir 85Ah 800A 19,36kg BOSCH
	S5015 Hægri + 12V L=393 B=175 H=190	Rafgeymir 110Ah 920A 25,0kg BOSCH

Start/Stop rafgeymar
S5 LÍNAN FRÁ BOSCH
Start/Stop rafgeymar

	S5A05 Hægri + 12V L=242 B=175 H=190	Rafgeymir 60Ah 680A 17,35kg BOSCH
	S5A11 Hægri + 12V L=315 B=175 H=190	Rafgeymir 80Ah 800A 22,76kg BOSCH
	S5A15 Hægri + 12V L=394 B=175 H=190	Rafgeymir 105Ah 950A 29,4kg BOSCH
	S5A08 Hægri + 12V L=278 B=175 H=190	Rafgeymir 70Ah 760A 20,09kg BOSCH
	S5A13 Hægri + 12V L=353 B=175 H=190	Rafgeymir 95Ah 850A 25,92kg BOSCH

Neyslugeymar fyrir bíla og hjólhýsi

	L4027 Vinstri + 12V L=272 B=175 H=225	Rafgeymir 75Ah 18,1kg BOSCH
	L5013 Hægri + 12V L=353 B=175 H=190	Rafgeymir 90Ah 800A 23,73kg BOSCH

Neyslugeymar fyrir bíla og hjólhýsi

	L4034 Vinstri + 12V L=330 B=172 H=238	Rafgeymir 105Ah 800A 23,7kg BOSCH
	L5075 Vinstri + og - 12V L=513 B=189 H=223	Rafgeymir 140Ah 800A 35,76kg BOSCH

RAFGEYMAR

Neyslugeymar fyrir bíla og hjólhýsi

	L5077 Vinstri + og - L=513 B=223 H=223	Rafgeymir 180Ah 12V 1000A 45,1kg		BOSCH
	6FM45 Hægri + L=197 B=165 H=170	Rafgeymir 45Ah 12V 14,6kg		雄稻股份 VISION GROUP
	6FM100D-X L:330 B=171 H=220	Rafgeymir 100Ah 12V 32kg		雄稻股份 VISION GROUP

RAFGEYMAR

Neyslugeymar fyrir bíla og hjólhýsi

	L5080 Vinstri + og - L=518 B=276 H=242	Rafgeymir 230Ah 12V 1150A 56,75kg		BOSCH
	6FM75 Vinstri + L=258 B=168 H=211	Rafgeymir 75Ah 12V 700A 21,2kg		雄稻股份 VISION GROUP

Rafgeymar fyrir traktora og vinnuvélar

T3 LÍNAN FRÁ BOSCH

Rafgeymar fyrir traktora og vinnuvélar

	T3036 Vinstri + L=346 B=173 H=236	Rafgeymir 110Ah 12V 680A 28,58kg		BOSCH
	T3040 Hægri + L=344 B=175 H=285	Rafgeymir 125Ah 12V 720A 31,22kg		BOSCH
	T3045 Vinstri + og - L=514 B=175 H=210	Rafgeymir 135Ah 12V 1000A 35,46kg		BOSCH

	T3037 Hægri + L=346 B=173 H=236	Rafgeymir 110Ah 12V 680A 28,58kg		BOSCH
	T3041 Vinstri + L=344 B=175 H=285	Rafgeymir 125Ah 12V 720A 31,22kg		BOSCH
	T3047 Vinstri + og - L=514 B=218 H=210	Rafgeymir 143Ah 12V 950A 39,85kg		BOSCH

Rafgeymar fyrir traktora og vinnuvélar

T4 LÍNAN FRÁ BOSCH

Rafgeymar fyrir traktora og vinnuvélar

	T4075 Vinstri + og - L=513 B=189 H=223	Rafgeymir 140Ah 12V 800A 35,76kg		BOSCH
---	--	---	---	--------------

Rafgeymar fyrir traktora og vinnuvélar

T5 LÍNAN FRÁ BOSCH

Rafgeymar fyrir traktora og vinnuvélar

	T5077 Vinstri + og - L=513 B=223 H=223	Rafgeymir 180Ah 12V 1000A 44,14kg		BOSCH
	643107. Hægri + L=508 B=174 H=205	Rafgeymir 143Ah 900A 37kg		VARTA

	T5080 Vinstri + og - L=518 B=276 H=242	Rafgeymir 225Ah 12V 1150A 57,5kg		BOSCH
---	--	---	---	--------------

Rafgeymar fyrir USA bíla

Rafgeymar fyrir USA bíla

	515 L=168 B=132 H=176	Rafgeymir 30Ah 12V 350A 8,5kg		DANBRIT
	790 L=257 B=175 H=180	Rafgeymir 65Ah 12V 790A 18,5kg		DANBRIT

	670 L=235 B=175 H=180	Rafgeymir 60Ah USA 12V 640A 14,5kg		DANBRIT
	850 L=292 B=189 H=191	Rafgeymir 90Ah 12V 900A 20kg		DANBRIT

RAFGEYMAR
Ýmsar gerðir 6V
RAFGEYMAR
Ýmsar gerðir 6V

	T105-TROJAN Rafgeymir 225Ah 6V L=264 B=181 H=272 29kg 	
--	---	--

Rafgeymar 12V
Varta Promotive Black
Rafgeymar 12V

	I18 Rafgeymir 110Ah Hægri + 12V 680A L=347 B=173 H=234 29,9kg 	 J1 Rafgeymir 125Ah Hægri + 12V 720A L=349 B=175 H=290 31,22kg 
	K8 Rafgeymir 140Ah Vinstri + 12V 800A L:513 B=189 H=223 35,76kg 	

Rafgeymar fyrir mótorhjól, fjórhjól og fl.
Rafgeymar fyrir mótorhjól, fjórhjól og fl.

	LTX5LBS Rafgeymir 20Wh Hægri + 12V 95A L=113 B=70 H=85 0,4kg M Li-ion 	 LTX7ABS Rafgeymir 2,4Ah Hægri + 12V 150A L=150 B=87 H=93 0,6kg M Li-ion 
--	---	---

Rafgeymar fyrir mótorhjól, fjórhjól og fl.
Rafgeymar fyrir mótorhjól, fjórhjól og fl.
Varta Powersports AGM

	503014. Rafgeymir 3Ah Hægri + 12V 40A L=114 B=71 H=86 	 504012. Rafgeymir 4Ah Hægri + 12V 80A L=114 B=71 H=106 
	507902. Rafgeymir 5Ah Hægri + 12V 120A L=113 B=70 H=105 	 506014. Rafgeymir 6Ah Hægri + 12V 100A L=114 B=71 H=131 
	506015. Rafgeymir 6Ah Vinstri + 12V 105A L=151 B=88 H=94 	 507901. Rafgeymir 7Ah Vinstri + 12V 120A L=150 B=66 H=94 
	508901. Rafgeymir 8Ah Vinstri + 12V 150A L=150 B=87 H=93 	 509902. Rafgeymir 8Ah Vinstri + 12V 115A L=149 B=70 H=105 
	508012. Rafgeymir 8Ah Vinstri + 12V 135A L=152 B=88 H=106 	 509901. Rafgeymir 9Ah Vinstri + 12V 200A L=150 B=87 H=110 
	510012. Rafgeymir 10Ah Vinstri + 12V 150A L=152 B=88 H=131 	 511902. Rafgeymir 11Ah Vinstri + 12V 230A L=150 B=87 H=110 
	512901. Rafgeymir 12Ah Vinstri + 12V 215A L=151 B=70 H=131 	 512014. Rafgeymir 12Ah Vinstri + 12V 200A L=152 B=88 H=147 

RAFGEYMAR
RAFGEYMAR
Varta Powersports AGM

	513903. Rafgeymir 13Ah Vinstri + 12V 190A L=152 B=70 H=150 		518918. Rafgeymir 18Ah Hægri + 12V 320A L=175 B=87 H=154 
	518901. Rafgeymir 18Ah Hægri + 12V 250A L=177 B=88 H=156 		518902. Rafgeymir 18Ah Vinstri + 12V 250A L=177 B=88 H=156 
	518908. Rafgeymir 18Ah Vinstri + 12V 270A L=150 B=87 H=161 		521908. Rafgeymir 21Ah Hægri + 12V 340A L=205 B=87 H=164 

	519901. Rafgeymir 19Ah 12V 170A L=186 B=82 H=173 GEL Pólr 90° halla. 	
---	--	--

Varta Powersports Freshpack


	512011. Rafgeymir 12Ah Vinstri + 12V 160A L=136 B=82 H=161 		512013. Rafgeymir 12Ah Hægri + 12V 160A L=136 B=82 H=161 
	514011. Rafgeymir 14Ah Hægri + 12V 190A L=135 B=90 H=167 		514012. Rafgeymir 14Ah Vinstri + 12V 190A L=136 B=91 H=168 
	530400. Rafgeymir 30Ah Hægri + 12V 300A L=168 B=132 H=176 		
	513106. Rafgeymir 13Ah Hægri + 12V 200A L=150 B=87 H=146 Silver Aux AGM 		
			066 BT91/7 Rafgeymaburðarkló 

RAFHLÖÐUR

RAFHLÖÐUR

	860 LR1	Rafhlaða 1,5V fyrir fjarstýringar.			860 LR3	Rafhlaða 1,5V AAA Stærð	ALKALINE LONGLIFE 4 stk í pakka
	4001. LADY	ALKALINE 1 stk í pakka					
	860 LR6	Rafhlaða 1,5V AA Stærð	ALKALINE LONGLIFE 4 stk í pakka		860 LR14	Rafhlaða 1,5V C Stærð	ALKALINE LONGLIFE 2 stk í pakka
	860 LR20	Rafhlaða 1,5V D Stærð	ALKALINE LONGLIFE 4 stk í pakka		860 6LR61	RAFHLAÐA 9V E Stærð	ALKALINE LONGLIFE 1 stk í pakka
	660 DSMN21B2	Rafhlaða 12V MN21 A23 Fyrir þráðlausar fjarstýringar. Dyrabjöllur og öryggiskerfi ALKALINE 2 stk í pakka Long lasting power.			440 871125204032	Rafhlaða LR43 / AG12 Stærð	ALKALINE GRUNDIG 6 stk í pakka
	440 871125285574	Rafhlöður 30stk	LR621 13mAh 5stk LR41 38mAh 5stk LR626 18mAh 5stk LR754 60mAh 5stk LR43 100mAh 5stk LR44 155mAh 5stk POWER +++ ALKALINE - GRUNDIG		440 8711252538921	Rafhlaða CR1620 70mAh	LITHIUM GRUNDIG 5 stk í pakka 860 CR1620 = 1stk
					860 CR2025	Rafhlaða CR2025	LITHIUM 1 stk í pakka
	860 CR2032	Rafhlaða 3V CR2032 200mAh	LITHIUM 1 stk í pakka		440 871125214143	Rafhlaða 3V CR2032 200mAh	LITHIUM 5 stk í pakka

GLITMERKI GUL
GLITMERKI RAUÐ

	482 202005-B	Glitauga gult 60mm 5mm bolti			482 202003	Glitmerki rautt 100x45mm	
	482 202001	Glitmerki rautt þríhyrningur 160mm			066 TB17	Glitmerki rautt 2stk 160x140mm	
	066 TB25	Glitmerki gult 2stk 75x46x10mm			066 TB24	Glitmerki rautt 2stk 75x46x10mm	
	297 810655	Glitauga gult 60mm			482 202004	Glitmerki gult 100x45mm	

GLITMERKI HVÍTT

	482 202008-B	Glitauga Hvítt 60mm 5mm bolti			298 EW0200	Inniljós Led 12-24V 0,4A Lumens 425 140mm	
	066 TB23	Glitauga Hvítt 2stk 75x46x10mm			298 EW0601	Inniljós Led 12-24V 144 Led 2,0 A Lumens 3700 635x100	

INNILJÓS

	297 800338-12	Inniljós Led 12V Með hreyfiskynjara 1mín			298 EW9001	Inniljós Led 12/24V 3x0,4W 0,08A Ljós í kverk 130x25x25mm	
	298 EW9002	Inniljós Led 12/24V 6x0,4W 0,17A Ljós í kverk EMC 230x25x25mm			298 EW9003	Inniljós Led 12/24V 12x0,4W 0,28A Ljós í kverk EMC 431x25x25mm	
	298 EW9000	Inniljós Led 12/24V 12x0,4W 0,28A EMC 386x69mm			298 EW9004	Inniljós Led 12/24V EMC 401x78mm	
	298 EW9005	Inniljós Led 12/24V 30x0,4W 0,56A EMC 401x (90mm)			298 EW0600	Inniljós Led 12/24V 96 Led 1,1A Lumens 2000 460x100 (18")	
	066 GL93	Ledljós með hreyfiskynjara 1W 3x AA rafhlöður			066 GL931	Ledljós með hreyfiskynjara 1,2W 3x AA rafhlöður	

AFTURLJÓS LED

AFTURLJÓS

	482 203001-LED 115x115mm	Afturljós 12V		482 203013-LED 140x85mm	Afturljós 10-30V
	066 TB18 98x98mm	Afturljós 12V		482 203002-LED 105x98mm "Multi-volt"	Afturljós 12V-24V
	482 203065-LED 150x80x26mm	Afturljós 10-30V		482 203065-W-LED 150x80x26mm	Afturljós 10-30V
	297 800398V 233x143x55mm Vinstri Kapall 1,95m IP68	Afturljós Led 12-24V		297 800398H 233x143x55mm Hægri Kapall 1,95m IP68	Afturljós Led 12-24V
	297 CLC-888L 397x128x46mm 70 Led ljós. 152mm á milli gata.	Afturljós Led 24V		297 800344 230mm snúra 84x24x10mm	Ljós aftan 12 Led 9-36V Rautt
	297 800050 100x120x55mm	Afturljós 12/24V Led		297 800341 230mm snúra 84x24x10mm	Ljós aftan 3 Led 9-36V Rautt
	297 800268 107x47x25mm 38cm snúra.	Bakkljós Led 12-24V IP66/68		297 800269 107x47x23mm 38cm snúra.	Bokuljós Led 12-24V IP66/68

	297 800188 Hvitt 20cm snúra 76x57,5x42mm	Staðsetningarljós 12V/24V		297 800188-R Rautt 20cm snúra 76x57,5x42mm	Staðsetningarljós 12V/24V
	297 800190 Hvitt báðum megin 35cm snúra 99,5x52x44,5mm	Staðsetningarljós 12V/24V		297 800345 230mm snúra 84x24x10mm	Ljós 12 Led 9-36V Hvítt

	482 206010-LED 80x35x35mm	Númeraljós 12V LED 12V			
	066 TB12 110x39x45mm	Númeraljós 12V Svart		297 800031 109x61x55,5	Númeraljós 12-24V LED Rautt
	297 800031-S 109x61x55,5	Númeraljós 12-24V LED Svart		297 800032-S 82,5x39x31	Númeraljós 12-24V LED Svart

HLIÐARLJÓS

HLIÐARLJÓS

	482 203020 12V	Hliðarljós á stétt Glært/rautt		482 203020-LED 12/24V	Hliðarljós á stétt Hvítt/rautt
					
	297 800370-N 12-24V	Hliðarljós gúmmí Hvítt/rautt		482 203022-LED 12-24V	Hliðarljós gúmmí Hvítt/rautt
					
	482 203021-LED 12-24V	Hliðarljós gúmmí Hvítt/rautt		482 203021	Hliðarljós L=16cm Hvítt/rautt
					
	297 800371V-N Vinstri 12-24V	Hliðarljós gúmmí Hvítt/rautt		297 800371H-N Hægri 12-24V	Hliðarljós gúmmí Hvítt/rautt
					
	297 800372V-N Vinstri 12-24V	Hliðarljós gúmmí Hvítt/rautt		297 800372H-N Hægri 12-24V	Hliðarljós gúmmí Hvítt/rautt
					
	482 203045-LED 110x45mm	Led ljós gult 24V		482 203045-LED-M 110x45mm	Led ljós gult 10-30V
					
	297 800340 230mm snúra 84x24x10mm	Hliðarljós 3 Led 9-36V Gult		297 800343 230mm snúra 84x24x10mm	Hliðarljós 12 Led 9-36V Gult
					

LJÓSKASTARAR



297 270771 Ljóskastari 9"
Halogen H7 perur
55W/70W IP56 12V/24V
223,7x243,57x122mm




297 270511 Ljóskastari ökuljós
7" Cree Led
60W IP67 10-40V
177,8x222x79mm




297 270914 Ljóskastari Sala
7" Cree Led
40W IP67 10-30V
182,4x188,4x85mm




297 270905 Ljóskastari Fritsla
9" Cree Led
50W IP68 9-33V
225x250x130mm




297 270773 Ljóskastari Visby
9" Xenon perur
35W IP56 9-36V
224x248,4x134,2mm




298 EW3010 Ljóskastari 360°
Með fjarstýringu 12-24V
2.7A
LUMENS 2250
HALLASVIÐ 135°



LJÓSKASTARAR



297 270918 Ljóskastari Hestra
7" Led
45W IP67 9-32V
177.8x201x70.5mm




297 270512 Ljóskastari ökuljós
9" Cree Led
60W IP67 10-40V
228x275x93mm




297 270913 Ljóskastari Sveg
9" Cree Led
60W IP67 10-30V
232x239x79mm




297 270906 Ljóskastari Extraljós
9" Led 32stk
96W IP68 9-36V
221x232x111mm




297 270900-12 Ljóskastari Lycksele
9" Xenon perur
D1S 35W/85V 12V/24V
228x224x122mm




297 270919 Ljóskastari Boda
9" Led
75W IP67 9-36V
223x288,6x73mm




297 809077 Ljóskastari Floby
8" Led
120W IP68 9-36V
208x230x96mm



VINNULJÓS MEÐ PERUM



298 PW1010SP Vinnuljós H3 pera
12/24V
55W/12V 70W/24V
106x106x84mm



VINNULJÓS MEÐ PERUM



298 PW1014SP Vinnuljós H3 pera
12/24V
55W/12V 70W/24V
140x100x92mm



LJÓSBAR LED



297 809105 Ljósabar Led 72W
Lumen 6480/3269
72W IP67 12-24V
358x78,5x86,5mm




066 LED038 Vinnuljós Led 36
230V Lumen 420
1230/1940mm
Undir húdd, samanbrjótanlegt



LJÓSBAR LED




297 809202 Ljósabar Led 70W
Lumen 5567
70W IP68 12-34V
551x72,3x53,5mm




066 LED136 Vinnuljós
230V Lumen 1400
1230/1680mm
Undir húdd, samanbrjótanlegt



VINNULJÓŚ

	297 809000 Vinnuljós Led mini Lumen 468 12W IP67 9-30V 72x65x40,5mm	strands -lighting division
	297 809240 Vinnuljós Led 92W Led Osram Lumen 15000 IP69K 10-32V 110x110x57mm	strands -lighting division
	297 809523 Vinnuljós Led 15W Lumen 1710/1250 IP67/69K 9-32V 107x41,5mmx133mm	strands -lighting division
	297 809071 Vinnuljós Led 27W CREE LED Lumen 2430/1700 27W IP68 9-32V 109x117,5x75mm	strands -lighting division
	297 809017 Vinnuljós Led 48W Lumen 3360/2088 48W IP67 10-30V 115x115x72mm	strands -lighting division
	297 809070 Vinnuljós Led 60W CREE LED Lumen 5400/3900 60W IP68 9-50V 155x130x66mm	strands -lighting division
	297 809030 Vinnuljós Led 15W Lumileds Lumen 1960/1862 15W IP68/69K 9-30V 144x49.6x74.5mm	strands -lighting division
	297 TD90007 Vinnuljós m/segli 18W IP67 12-24V 165x72x75mm	strands -lighting division
	297 809026 Vinnuljós Led 18W Lumen 1260/1080 18W IP67 10-30V 160x70x56mm	strands -lighting division
	298 EW3114 Vinnuljós Led 60W Lumen 2600 IP67 12-24V 14" á lengd	VISION ALERT

VINNULJÓŚ HLAÐANLEGT

	297 TD90006 Vinnuljós Led 15W Hleðsluljós Lumen 960 Full hleðsla á 4 klukkust. 277x84x37mm	strands -lighting division
	066 LED200WS Vinnuljós Led Með hleðslubanka Með hátalara Fimm stillingar Lumen frá 100-2000	SEALEY

VINNULJÓŚ

	297 809002 Vinnuljós Led mini Lumen 1000/960 5x3W IP67 10-30V 85x85x40mm	strands -lighting division
	297 809517 Vinnuljós Led 25W Lumen 3040/2200 16X1,5W IP69K 9-32V 108x139x48mm	strands -lighting division
	297 908517 Vinnuljós Led 25W Lumen 3040 25W IP67 110x110x47mm	strands -lighting division
	066 WL48W Vinnuljós Led 48W Lumen 3450 48W IP67 9-32V 125x100	SEALEY
	297 808011 Vinnuljós Led 64W Led Osram Lumen 6187/5200 64W IP67/69K 9-32V 101x101x45mm	strands -lighting division
	297 809063 Vinnuljós Lyftara Blátt ljós í kringum lyftarann. 12-24V 140x90x87mm	strands -lighting division
	066 LED121 Vinnuljós Led 15W Lumen 900 M/segli 1,5metra snúra. 12V	SEALEY
	066 LED3RM Vinnuljós Led Lumen 2160 M/Segli 10-30V	SEALEY
	298 EW3214 Vinnuljós Led 120W Lumen 4800 IP67 12-24V 14" á lengd	VISION ALERT

VINNULJÓŚ Á FÆTI

	030 4821106 Vinnuljós Led 30W 230V Lumen 3300 270x270mm	SONIC equipment
	066 LED360FR Vinnuljós á fæti rautt Lumen 3000 Hleðsluljós Lithium	SEALEY

ÞOKULJÓS

	297 270708 IP67 9-32V 200x142x85mm	Pokuljós 30W Alaska Lumen 1008/1380	
	297 270785 IP67 12-24V 180x65mm	Pokuljós 60W Sigma Lumen 4590	
	297 270787 IP68 9-36V 218x84mm	Pokuljós 9" 120W Lumen 10200	



ÞOKULJÓS

	297 270775 IP67 12-48V 245x140x90mm	Pokuljós 80W Delta Lumen 6200	
	297 270777 IP68 12-24V 178x88mm	Pokuljós 7" 66W Lumen 4469	
	297 270926 IP68 9-33V 223x119.5mm	Pokuljós 9" 50W Lumen 3500	

	066 LED086 10W IP54 230V Dreifir ljósi 110°	Fljóðljós m/skynjara Lumen 800	
	066 LED089 70W IP54 230V	Fljóðljós m/skynjara Lumen 5600	
	066 LED113 50W IP65 230V	Fljóðljós extra slim Lumen 4500	
	066 LED24230 24W IP65 230V	Vinnuljós Led 24W Lumen 2500	
	066 LED184 Prjár stillingar Lumen 1900/1100/650 Hleðslutími 9 klukkutímar.	Fljóðljós Led 20W	
	066 LED190T IP65 Hleðslutími 5,5 klukkutímar.	Fljóðljós Led 20W Prjár stillingar Lumen 1600/800/480	
	066 LED193ST	Standur f/kastara	

AÐVÖRUNARLIJÓS


AÐVÖRUNARLIJÓS

  298 30000260 Aðvörunarljós Led 12-48V Gult 298 30000360 Aðvörunarljós Led 12-48V Rautt 298 30000460 Aðvörunarljós Led 12-48V Blátt 298 30000560 Aðvörunarljós Led 12-48V Grænt IP67 EMC 0,1A 81x54mm 	  298 30115270 Aðvörlunarljós Xenon 10-100V Gult 298 30115370 Aðvörlunarljós Xenon 10-100V Rautt 298 30115470 Aðvörlunarljós Xenon 10-100V Blátt IP67 EMC 0,5A 81x54mm 
 298 42600201 Aðvörunarljós Xenon 12-24V Gult IP65 EMC 148x63mm 	 298 43900204 Aðvörunarljós Xenon 12-24V Gult IP67 EMC 77x45mm 
 298 6260A Aðvörunarljós Led Mini 12-80V Gult Led Beacon 71x125mm 	 298 49800101 Aðvörunarljós Led ECE IP65 12-100V 3 Boltar Orion-Beacon 147x106mm 
 298 46809202 Aðvörunarljós Xenon 10-30V Gult 12mm bolti 112x147mm 	 298 EB5010R Aðvörunarljós Led R10, IP65 12/24V 3 Boltar ECCOLED 147x106mm 
 298 EB5010G Aðvörunarljós Led R10, IP65 12-24V 3 Boltar ECCOLED 148x120mm 	 298 EB5010A Aðvörunarljós Led R10, IP65 12/24V 3 Boltar ECCOLED 148x120mm 
 298 EB5010B Aðvörunarljós Led R10, IP65 12/24V 3 Boltar ECCOLED 148x120mm 	 298 EB5014A Aðvörunarljós Led R65, R10, II Gult 12/24V 3 Boltar ECCOLED 148x120mm 
 297 800264 Aðvörunarljós Led IP66/IP68 Með segli 10-32V 3metra snúra Beacon 162x112mm 	 298 47001701 Aðvörunarljós Delta star m/segli 
 297 809057 Aðvörunarljós Led ECE R65 Á rör 12-24V Rör gat 24mm Með rafmagnstengi 128X235,5mm 	 297 809056 Aðvörunarljós Led ECE R65 12-24V Beacon 142x183mm 
 298 404001 Aðvörunarljós flexi H1 pera 12V EMC 55W/70W 134x214mm 	 298 404002 Aðvörunarljós flexi H1 pera 24V EMC 55W/70W 134x214mm 
 298 304000 Aðvörunarljós Flexi EMC R65 H1 pera 12-24V 55W/70W 130x204mm 	 297 809058 Aðvörunarljós Led ECE R65 m/segli 12V-24V IP56 141x181mm 
 298 ED0016A Aðvörunarljós Gult m/segli Fyrir rafhlöður 4 x AA 	 298 ED0016R Aðvörunarljós Rautt m/segli Fyrir rafhlöður 4 x AA 

AÐVÖRUNARLIJÓ

AÐVÖRUNARLIJÓ

	298 49704201 Aðvörunarljós Led Gult 12-24V ECE R65 125x92x62mm VISION ALERT		298 49704401 Aðvörunarljós Led Blátt 12-24V ECE R65 125x92x62mm VISION ALERT
---	---	---	--

	298 48302202 Aðvörunarljós BAR Tvö ljós. IP54 370x185x175 VISION ALERT		298 13-00001-E Aðvörunarljós Led Gult 12-24V 770x200x85 VISION ALERT
	297 8508949 Aðvörunarljós Led ECE R65 480mm 12-24V strands -lighting division		297 8508950 Aðvörunarljós Led ECE R65 900mm 12-24V strands -lighting division
	066 MLB80MB Ljósabar mini IP56 12-24V 80 Led Með segli 279x165x61mm SEALEY		066 MLB80SB Ljósabar mini IP56 12-24V 80 Led Einn bolti sem festir 279x165x61mm SEALEY

	066 WL183D Vinnuljós með stækkunargleri Model No: WL183D 230V LEDs: 18 SMD Supply: 230V SEALEY	
--	--	--

LJÓTABRETTI Á KERRU

KERRULJÓS

482 203017-LED

Ljósabretti LED / þokuljós 12V

8metra snúra.



066 TB3/2

Ljósabretti

92 cm á lengd

12V

2 metra kapall

7 pinna

066 TB0212

Ljósabretti

2 stk/pk

12V

10 metra kapall

7 pinna



285x190mm

066 TB4/5

Ljósabretti

120cm á lengd

12V

5 metra kapall

7 pinna

066 TB4/5LED

Ljósabretti

122cm á lengd

12V

5 metra kapall

7 pinna.



1200x193mm

1220mm á lengd.

482 303045-PVC

Kapall 7 víra
framlenging
með tengjum.

4 metrar

482 203019-LED

Kerruljósasett m/segli, par
Led ljós, 7,5m kapall



297 800306-KIT

12-24V

Kerruljós led par.

145x163x63mm



066 TB18LED MAG

Afturljós Led

12V

Með segli



482 304005

Kerrukapall

7x0,75mm²

50metrar á rúllu



482 303038

Tester fyrir
7 pin

066 TST22

Prufutæki fyrir

13 og 7pinna



KERRUTENGI 7 PÓLA

KERRUTENGI 7 PÓLA

	482 303020	Kerrutengi 7 póla Svart hann		482 303021	Kerrutengi 7 póla Ál hann
	066 TB06	Kerrutengill 7póla Ál hann		470 117500	Kerrutengi 7 póla Ál hann
	482 303031	Kerrutengill 7póla Ál hann 24V		299 P713	Framlenging úr 7 pinna litlum í sjö pinna stórt 1 meter á lengd Hún - Hann
	482 303025	Kerrutengi 13 póla Svart hann		482 303039	Breytistykki 13 póla í 7 pinna
	482 303039-K	Breytistykki 13 póla í 7 pinna Stutt		482 303049	Breytistykki 7pinna í 13 pinna

KERRUTENGI 7 PÓLA HÚS

KERRUTENGI 7 PÓLA HÚS

	482 303022	Kerrutengi 7 póla Svart hún		482 303023	Kerrutengi 7 póla Svart hún Með tengi fyrir þokuljós
	482 303022-C	Gúmmí-hlíf á Tengidós		482 303024	Kerrutengi 7 póla Ál hún
	482 303026	Kerrutengi 13 póla Svart hún		066 TB08	Kerrutengi 7 póla Ál hún
	470 118510	Kerrutengi 7 póla Ál hún		482 303034	Kerrutengi 7 póla Ál hún 24V
	066 TB61	Millilegg undir kerrutengi		482 303040	Tengjasett hún 7 póla Fyrir vagna.
	066 TB38	Lás fyrir dráttarbeisli Universal fitting Ø50mm tow ball lock expands in coupler to prevent towing away. Quick and easy to install. Non-corrosive.		066 TB45	Dráttarkúlulús Universal fitting Ø50mm tow ball trailer hitch lock. 12mm Steel bar and cast steel body helps protect against trailer and caravan theft. Easy to install and remove.

TENGIMYND 7 PINNA

TENGIMYND 7 PINNA



1 Gulur	Vinstra stefnuljós
2 Blár	Inni - Bakk og Þokuljós
3 Hvítur	Jörð
4 Grænn	Hægra stefnuljós
5 Brúnn	Hægra afturljós, -Númers & Stöðuljós
6 Rauður	Bremsuljós
7 Svartur	Vinstra afturljós, -Númers & Stöðuljós

TENGIMYND 13 PINNA

TENGIMYND 13 PINNA



1 Fjólublár	Vinstra Stefnuljós
2 Blár	Þokuljós / Frjálst
3 Hvítur	Jörð fyrir lið 1. til 8.
4 Svart/Hvítur	Hægra Stefnuljós
5 Brúnn	Hægra Afturljós og númerljós
6 Rauður	Bremsuljós
7 Svartur	Vinstra afturljós og númerljós
8 Svart/Gulur	Bakkljós
9 Rauður/Svart	Straumforði - Stöðugur straumur +
10 Svart/Hvítur	Hleðsla fyrir rafgeymi - kveikjukerfi +
11 Frjálst	Laus * ekki notaður
12 Frjálst	Laus * ekki notaður
13 Hvítur	Jörð fyrir lið 9. til 12.

HLEÐSLUTÆKI FYRIR SÍMA

HLEÐSLUTÆKI FYRIR SÍMA



440 871125229950
Hleðslutæki USB síma



440 871125273047
USB Hleðslutæki 12V Dual

440 871125208563
Hleðslutæki 4 USB ÚTTÖK
220V



2 Úttök 2,1A
2 Úttök 1,0A

LJÓSABORÐI



440 871125243379
LJÓSABORÐI LED 2M 12V/24V
60 LED 12/24V M/FJARSTÝRINGU

VASALIÓS

VASALIÓS

	032 700S7 Vasaljós Penni Led Rafhlöður fylgja 2W 110 Lumen 2 x AAA Rafhlöður 135x15mm IP65			030 4821109 Vasaljós Penni Led 1W 100 Lumen 2 x AAA Rafhlöður 138x16mm	
	066 HT054 Vasaljós Penni led Hlaðanlegt USB-12V 100/10lm 170mm 3 Litir			066 LED043 Vasaljós Penni Led 0,5W 50 Lumen 2 x AAA Rafhlöður 130mm	
	066 LED450 Vasaljós Led 20W Hlaðanlegt USB 2000 Lumen Vinnudrægni 500metrar			066 LED011 Vasaljós Penni Led 1W 70 Lumen 2 x AAA Rafhlöður 145mm	
	032 700S8 Vasaljós Led 10W Hlaðanlegt 12-230V 814 Lumen Hleðslurafhlaða USB 146x27mm IP65			032 60032 Vasaljós Led P60 Rafhlaða fylgir 60 Lumen 1 x AA Rafhlaða 107x20mm	
	066 LED050 Vasaljós Led 1W Vatnshelt IP67 90 Lumen 2 x AA Rafhlöður			066 LED051 Vasaljós Led 3W Vatnshelt IP67 120 Lumen 2 x D Rafhlöður	
	032 700S5 Vasaljós Led 3W Rafhlöður fylgja 320 Lumen 3 x AAA Rafhlöður 110x26mm IP65			032 700S1 Vasaljós Led 3W Rafhlöður fylgja 420 Lumen 4 x AAA Rafhlöður 122x30mm IP65	
	032 700P610 Vasaljós Led 10W Rafhlöður fylgja 83/610Lumen 4 x AAA Rafhlöður 125x37mm IP45				

066 LED072 Vasaljós Led 3W með verkfærum Öryggihamar, vasaljós og smá verkfæri 3xAAA Rafhlöður			066 LED438 Handljós 10W Led Tvær stillingar 850/280 Lumen Hlaðanlegt	
				

	066 LED700PR Vinnuljós m/segli 3 stillingar 100/350/700 Lumen			066 LED185W Húfa með Led ljósi Hlaðanlegt USB Heyrnartól og bluetooth	
	066 VS6021 Útfjólublátt ljós Hlaðanlegt Fyrir leit á leka úr kælikerfi og fl.			066 LED185 Húfa með Led ljósi Hlaðanlegt USB	

VINNULIÓS-HANDLIÓS

	066 LED1001 Sveigjanlegt 360° 100 Lumen IP54	Handljós Led 8W Hlaðanlegt USB	
	032 14025A Sveigjanlegt 90° 350 Lumen IP54 280mm	Handljós Led 3W Hlaðanlegt PRO C2	
	066 LED027 Hleðsluljós. 250 Lumen IP43 320mm	Handljós Led 3W	
	066 LED360 360°Snúningur Hleðsla micro USB 280mm	Handljós Led 3W Lumen 400	
	066 LED3601G 360°Snúningur Hleðsla micro USB 170mm	Handljós Led 2W Grænt	
	066 LED3602CAMO 360°Snúningur Hleðsla micro USB 270mm	Handljós Led 3W	
	066 LED3604G Hleðsluljós Lithium Lumen (600/50)/120lm 400mm	Handljós Led 360°	

VINNULIÓS-HANDLIÓS

	030 4821111 3 x AA Rafhlöður 120 Lumen 226x60x47mm	Handljós Led 3W Með krók/segli	
	030 4821112 3 x AA Rafhlöður 90 Lumen 195x62,5x35mm	Handljós Led 1W Með krók	
	066 LED042 200 Lumen 300mm	Handljós Led 12 SMD Led	
	066 LED3601 360°Snúningur Hleðsla micro USB 170mm	Handljós Led 2W Svart	
	066 LED3601R 360°Snúningur Hleðsla micro USB 170mm	Handljós Led 2W Rautt	
	066 LED3604 Hleðsluljós Lithium Lumen (600/50)/120lm 400mm	Handljós Led 360°	
	066 LED3604R Hleðsluljós Lithium Lumen (600/50)/120lm 400mm	Handljós Led 360°	

ENNISLIÓS

ENNISLIÓS

	066 HT03LED 3 x AAA Rafhlöður fylgja 10 Lumen	Ennisljós Led	
	032 700H8 3 x AAA Rafhlöður 180 Lumen IP44 PRO H8	Ennisljós Led 3W 3 Stillingar	
	066 HT107LED 3 x AA Rafhlöður 300 Lumen Með birtustilli.	Ennisljós Led 5W 5W CREE XPG	
	032 700H1 3 x AAA Rafhlöður 365 Lumen IP44 PRO H1	Ennisljós Led 5W 2 Stillingar	
	066 HT110 170 Lumen	Ennisljós Led 3W Vasaljós fylgir	

	066 LED360HT Hlaðanlegt USB 160/60 Lumen	Ennisljós Led 2W Tvær stillingar	
	066 HT103LED 3 x AAA Rafhlöður 100 Lumen	Ennisljós Led 3W	
	066 HT111LED 3 x AA Rafhlöður 350Lm og 80 Lm	Ennisljós Led 5W	
	066 HT101 3 x AAA Rafhlöður 200 Lumen	Ennisljós Led 3W	
	066 HT108LED Hlaðanlegt 360/100 Lumen USB og Hreyfiskynjari.	Ennisljós Led 5W 2 Stillingar	
	032 700H2-R Hlaðanlegt 420 Lumen IP65 PRO H2-R	Ennisljós Led 2 Stillingar	

LJÓSAHUNDUR

032 18101A Ljósahundur 11W
360 Lumen 5m Kapall
220-240V
11W G23 pera 400x44 Með krók **ELWIS**

482 509048
Loftdæla 12V 150psi
80ltr á mín **REAL-PARTS HOLLAND**

066 TP80 Olíudæla fyrir
5-20ltr brúsa
9ltr/mín
2x AA rafhlöður **SEALEY**

TJALDLUKT

660 LNT-100 Tjaldlukt LED
95Lumen 16 LED PERUR
3xD Rafhlöður, fylgja ekki með.
230X114X112mm **DURACELL**

LOFTDÆLA 12V

066 MAC01 Loftdæla 12V 120psi
Model No: MAC01 25ltr á mín.
Hose Length: 600mm
Power Cord Length: 3.3mtr
Operating Voltage: 12V **SEALEY**

066 MAC07 Loftpressa míní 12V
95ltr á mín
Model No: MAC07
Hose Length: 7500mm
Power Cord Length: 3mtr
Operating Voltage: 12V
Typical Inflation Time: 0-30psi in 45sec (175/70/R13)
Maximum Current: 40A
Maximum Pressure: 150psi **SEALEY**

066 TP94 Olíutunnudæla 12V
Model No: TP94
Voltage: 12V
Current: 4.5A
Duty Cycle: 15min/hr
Flow Rate: 16.5ltr/min **SEALEY**

066 TP9424 Olíutunnudæla 24V
Model No: TP9424
Voltage: 24V
Current: 3.5A
Duty Cycle: 15min/hr
Flow Rate: 15ltr/min **SEALEY**

482 502002 Rúðusprautudæla
Universal 12V **REAL-PARTS HOLLAND**

482 502003 Rúðusprautudæla
12V **REAL-PARTS HOLLAND**

440 871125207659 Fjölgengi hvítt m/rofa
3.tengl.

066 STF42 Vifta 3ja hraða 42"
Model No: STF42 230V
Speeds: 3
Oscillation: Yes
Supply: 230V
Power: 55W
Height: 1065mm **SEALEY**

FJÖLTENGI 230V

440 871125256672 Fjöltengi hvítt m/rofa 4. tengl.

RAFVIRKJAHANSKAR 1000V

066 HVG1000VL Rafvirkjahanskar **SEALEY**

LJÓSAPERA LED 230V

066 LED060 Ljósapera LED 10W
6500K White light E27
810 Lumen
30.000 Klukkutíma ending.
SEALEY

Bluetooth hátalari

066 SB1 Hátalari þráðlaus
790gr.
Hlaðanlegur með USB snúru **SEALEY**

HLEÐSLUTÆKI

HLEÐSLUTÆKI

066 SDC150 Hleðslutæki 6-12V

Model No:	SDC150	240V
Output:	12/24V	
Output Charge Peak:	15A	
Battery Range:	20-100Ah	
Supply:	230V	




066 AUTOCHARGE12S Hleðslutæki 12/24V
230V
12 amp hleðsla




066 SPI3S Hleðslutæki 6/12V
3A

Model No:	SPI3S	
Output:	12V	
Output Charge:	3A	
Battery Range:	Lead Acid 12-50Ah, LiFePO4 3-50Ah	
Cable Length:	2mtr	
Supply:	230V	
Weight:	0.8kg	
IP Rating:	IP64	



Fyrir LITHIUM hleðslu



066 SPI15S Hleðslutæki 6/12V
15A

Model No:	SPI15S	
Output:	12V	
Output Charge:	15A	
Battery Range:	Max. 230Ah Lead Acid	
Cable Length:	1.8mtr	
Supply:	230V	
Weight:	1.5kg	
IP Rating:	IP20	



Fyrir LITHIUM hleðslu



066 CHARGE110 Hleðslutæki 12/24V

Model No:	CHARGE110	
Output:	12/24V	
Output Charge Peak(EN):	14A(10A)	
Battery Range:	20-120Ah	
Input Charge:	0.9A	
Charging Rates:	2	
Supply:	230V	
Polarity Protection:	Fuse (1 x 20A)	




066 SUPERCHARGE40/1 Hleðslutæki 12/24V

Model No:	SUPERCHARGE40/1	
Output:	12/24V	
Output Charge Peak(EN):	18A(12A)(12V), 12A(8A)(24V)	
Battery Range:	30/225Ah(12V), 20/180Ah(24V)	
Input Charge:	1A	
Charging Rates:	2	
Supply:	230V	
Polarity Protection:	Fuse (1 x 20A)	
Consumable Parts:	SBF2050 (Pack of 50) - Fuse	




066 BSCU25 12/24V
Hleðslutæki/Vaktari

Model No:	BSCU25	
Type:	9-Cycle with Support	
Input Voltage:	230V	
Input Current:	2.4A	
Charging Voltage:	12V/24V	
Charging Current 12V:	25A	
System:		
Charging Current 24V:	12.5A	
System:		
Battery Support Mode:	<300W	




066 AUTOCHARGE100HF Hleðslutæki 1A 6/12v
Battery range
0.8-14Ah




066 AUTOCHARGE200HF Hleðslutæki 2A 6/12v
Battery range
1.3 - 60 Ah




066 AUTOCHARGE1200HF Hleðslutæki 12A 12/24v
Battery range
1.3 - 400 Ah




066 SMC11 Hleðslutæki/Vaktari
12V

Model No:	SMC11	
Specification Table:		
Type:	3-Cycle 12V	
Supply:	230V	
Output:	12V	
Input Current:	0.25A	
Efficiency:	>80%	
Charging Current:	0.8A	
Back Current Drain:	<1Ah/month	
Ambient Temperature:	-20°C to +50°C	
Dimensions (W x D x H):	178 x 66 x 38mm	
Housing Protection:	XXX	
Weight:	0.4kg	




066 SL65S Hleðslutæki Lithium

Model No:	SL65S	
Maximum Current:	400A	
Voltage:	12V	
Auxiliary Output:	USB (x2) - 5V/2.1A, 5V/1A	
Cable & Clamp Length:	430mm	
Size (W x D x H):	78 x 25 x 125mm	
Weight:	285g	
Maximum Starting Capacity:	2ltr Petrol/1.6ltr Diesel	
Capacity:	8000mAh	




066 SL66S Startkapall fyrir
SL65S

Model No:	SL66S	SL65S
Length:	640mm	
Application(s):	SL1S, SL65S	




HLEÐSLUTÆKI

066 SMC12

Hleðslutæki/Vaktari

230V

12V

1,5A

3-Cycle 12V

IP65

0.49kg



198 x 68 x 41mm

SEALEY

HLEÐSLUTÆKI

066 SMC13

Hleðslutæki/Vaktari

230V

6/12V

4A

9-Cycle 6/12V

IP65

0.66kg



242 x 82 x 53mm

SEALEY

STARTTÆKI

STARTTÆKI

 066 E/START800 Starttæki Rafhlöðulaust starttæki 12V Model No: E/START800 Output: 12V Output Start Peak(EN): 800A(400A) SEALEY	
 066 E/START1600 Starttæki Rafhlöðulaust starttæki 12V Model No: E/START1600 Output: 12V Output Start Peak(EN): 1600A(800A) SEALEY	 066 E/START1224 Starttæki Rafhlöðulaust starttæki 12/24V Model No: E/START1224 Output: 12/24V 12V Output Start Peak(EN): 1000A(500A) 24V Output Start Peak(EN): 1600A(800A) SEALEY
 066 RS132 Starttæki 12V með loftdælu/ljós. 900 Peak Amps. 400 Cold Cranking Amps. Kapall 720mm langir SEALEY	 066 RS131 Starttæki 12V Model No: RS131 Cold Cranking Amps: 250A Peak Amps: 750A Voltage: 12V Auxiliary Output: 5V/2.1A USB (x2), 12V Cable & Clamp Length: 780mm Integral Air Compressor: - Maximum Pressure: - Weight: 5.9kg SEALEY
 066 RS1B Starttæki 12V 900 Peak Amps. 200 Cold Cranking Amps. Fyrir fólksbíla 4 cyl, 2 ltr SEALEY	 066 START320 Start/hleðslutæki 12/24V Model No: START320 Specification Table: Output: 12/24V Output Charge Peak(EN): 45A(30A) Output Start Peak(EN): 320A(220A) Battery Range: 30-500Ah Input Charge: 5A Input Start: 20A Charging Rates: 3 Supply: 230V Polarity Protection: Fuse (1 x 110A) SEALEY
 066 PP1 Bilanagreinir auto 6-24V - A brilliant tool for the auto electrician and mechanic. - Carry out the following tests on systems from 6V up to 24V quickly and efficiently: SEALEY	
 066 VS6021 Útfjólublátt ljós Hlaðanlegt Fyrir leit á leka úr kælikerfi og fl. SEALEY	
 066 PROSAF/12 Rafgeymavörn Rafsuðu 12V SEALEY	
 066 S01001 Rafsuðuhjálmur Vinnuhiti -5°C til +60°C Þyngd 515gr Solarsella Operating time light/dark 0.01ms Shade Active : 9-13 Variable SEALEY	 066 PROSAF/24 Rafgeymavörn Rafsuðu 24V SEALEY
	 066 VS027 Bremsuvökmælir Model No: VS027 Moisture Content: Green: <0.5% Yellow: 0.5-3.5% Red: >3.5% - Easily calibrated using new brake fluid. - Audible test cycle with three LED read-out. - Just insert probe and press button for immediate result. - Works on DOT 3, 4 and 5.1 specification fluids. - Powered by a 9V battery (not included). SEALEY

RAFSUÐUTÆKI

RAFSUÐUTÆKI



066 INVMIG200LCD Rafsuðuvél MIG

Model No:	INVMIG200LCD	230V
Specification Table:		200Amp
Duty Cycle:		
MIG:	20% @ 200A, 100% @ 89A	
TIG:	20% @ 180A, 100% @ 80A	
MMA (Arc):	20% @ 180A, 100% @ 80A	
Wire Capacity:	5kg	
Electrode Capacity:	Ø1.6-4mm	
Absorbed Power:	8.6kW	
Supply:	230V	
Insulation:	IP21S	
Protection:	H	
Weight:	20kg	
MIG Torch:	Euro Non-Live BINZEL® MB15*	
MMA Accessory Kit (Optional):	MMAD1	
TIG Accessory Kit (Optional):	TIG10S	
Note:	*Included as standard	

SEALEY



066 SUPERMIG230 Mig Suðuvél

Model No:	SUPERMIG230	230V
Welding Current:	30-230A	
Wire Capacity:	5-15kg	
Duty Cycle:	100% @ 68A, 60% @ 88A, 15% @ 175A	
Cooling System:	Forced Air	
Spot Welding Timer:	Yes	
Gas Type:	CO2, Argon, CO2/Argon Mix	
Torch:	3mtr Euro Non-Live - BINZEL® MB15	
Supply:	230V	
Absorbed Power:	8kW	
Case Size:	Large	
Weight:	49.5kg	

SEALEY



066 MGC946 Jarðtengill segull

Model No:	MGC946	250Amp
Specification Table:		
Rated:	250A	
Base Size:	Ø85mm	

SEALEY



066 PP40H Plasmaskurðarvél

Model No:	PP40H	40 Amp
Specification Table:		
Power Output:	15-40A	
Duty Cycle:	35% @ 40A, 60% @ 30.5A, 100% @ 23.6A	
Maximum Cutting Thickness:	15mm	
Air Requirements:	300ltr/min	
Working Pressure:	45-70psi	
Absorbed Power:	6.4kW	
Supply:	230V	
Insulation:	H	
Protection:	IP21S	
Weight:	11.3kg	
Replacement Consumables:		
Electrode, Short (Pack Qty):	PP40H.V2.E (x5)	
Nozzle, Short (Pack Qty):	PP40H.V2.N (x5)	
Diffuser (Pack Qty):	PP40H.V2.D (x5)	
Safety Cap (Pack Qty):	PP40H.V2.SC (x2)	

SEALEY



066 PWH2 Rafsuðuhjálmur

Vinnuhiti -5°C til +55°C

Þyngd 535gr

Solarsella

Operating time light/dark 0.04ms

Shade Active : 9-13 Variable

SEALEY



066 VS240 Spanhitari 1000W

Model No:	VS240
Contents:	VS2303 - Direct Coil - Ø20mm, VS2307 - Direct Coil - Ø32mm, VS2309 - Pad Coil - Ø55mm, VS2410 - Flex Coil - 830mm
Frequency:	50/60Hz
Power:	1000W
Supply:	230V

SEALEY



066 MIGHTYMIG100 Rafsuðuvél Mig

3KW	100Amp
Gas laus	230V
Fluxvír	

Aukavír = 066 TG100/1

SEALEY



066 VS230 Spanhitari 2000W

Model No:	VS230	230V
Contents:		
VS2303:	Direct Coil - Ø20mm	
VS2305:	Direct Coil - Ø30mm	
VS2304:	Side Coil - Ø20mm	
VS2306:	Side Coil - Ø30mm	
VS2309:	Pad Coil - Ø55mm	
VS2310:	Flex Coil - 740mm	
VS2311:	Induction Block - 50 x 35 x 30mm	
Supply:	230V	
Frequency:	50/60Hz	
Power:	2000W	

Fullt af stökum aukahlutum .

15mm - 32mm göt .

SEALEY



066 WE1020 Rafsuðuvír 2,0mm

Model No:	WE1020
Size:	Ø2 x 300mm
Welding Current:	40-60A
Pack Quantity:	10



066 WE1025 Rafsuðuvír 2,5mm

Model No:	WE1025
Size:	Ø2.5 x 300mm
Welding Current:	55-100A
Pack Quantity:	10



066 WE1032 Rafsuðuvír 3,2mm

Model No:	WE1032
Size:	Ø3.2 x 350mm
Welding Current:	90-130A
Pack Qty:	10

SEALEY



066 VS2301 Hitaelement snúið

Beint 15mm



066 VS2303 Hitaelement snúið

Beint 20mm



066 VS2305 Hitaelement snúið

Beint 28mm



066 VS2307 Hitaelement snúið

Beint 32mm



066 VS2309 Hitaelement snúið

Púði 55mm



066 VS2311 Hitaelement kubbur

50x30x35mm

SEALEY



066 VS2302 Hitaelement snúið

Hliðar 15mm



066 VS2304 Hitaelement snúið

Hliðar 20mm



066 VS2306 Hitaelement snúið

Hliðar 28mm



066 VS2308 Hitaelement snúið

Hliðar 32mm



066 VS2310 Hitaelement snúra

740mm

SEALEY

 066 PW1500 Háþrýstidæla 1400 W 300ltr/hr 105bar 230V 13A SEALEY	 066 PW1600 Háþrýstidæla 110bar 230V Model No: PW1600 Maximum Pressure: 110bar(1600psi) Effective Cleaning Power: 187bar(2720psi) Water Flow: 318ltr/hr Motor Power: 1300W Supply: 230V - 13A Total Stop System: Yes Rotablast Nozzle®: Yes Hose Length: 5mtr Weight: 7.7kg SEALEY
 066 PW1750 Háþrýstidæla 120 bar 230V Model No: PW1750 Maximum Pressure: 120bar(1750psi) Effective Cleaning Power: 205bar(2975psi) Water Flow: 360ltr/hr Motor Power: 1400W Supply: 230V - 13A Total Stop System: Yes Rotablast Nozzle®: Yes Hose Length: 5mtr Weight: 13.5kg SEALEY	 066 PW2000 Háþrýstidæla 140bar 230V Model No: PW2000 Maximum Pressure: 140bar(2030psi) Effective Cleaning Power: 257bar(3740psi) Water Flow: 402ltr/hr Motor Power: 1700W Supply: 230V - 13A Total Stop System: Yes Rotablast Nozzle®: Yes Hose Length: 5mtr Weight: 19.5kg SEALEY
 066 GV180WM Ryksuga á vegg 1500W 230V 18lítra Bílskýrsryksuga á vegg. Fyrir blautt og þurr. SEALEY	 066 PC460 Ryksuga "wet & dry" 230V Model No: PC460 Motor Power: 1600W Supply: 230V Drum Size: 60ltr Drum Type: Stainless Steel Weight: 16kg Vacuum Accessories Ø: 38mm Filter Type: Cartridge Replacement Cartridge Filter: PC200CFL Replacement Foam Filter: PC460.ACC7 SEALEY
 066 PC102 Ryksuga 1000W 1000W 230V 10lítra Fyrir blautt og þurr. SEALEY	 066 PC200SD Ryksuga 1250W 1250W 230V 20lítra Fyrir blautt og þurr. SEALEY
 482 504041 Þvottakar 75,7ltr m/dælu 230V REAL-PARTS HOLLAND	 066 SM28 Þvottakar m/dælu 230V á hjólum. Model No: SM28 Overall Height: 898mm Tank Height: 260mm Tank Width: 540mm Tank Length: 810mm Pump Output/hr: 200ltr Motor Power: 25W Supply: 230V Weight: 32kg Maximum Working Capacity: 50ltr Minimum Working Capacity: 40ltr SEALEY
 066 SCT09 Ultrasonic Þvottavél Min 5ltr Max 9ltr 230V Hitastig upp í 80°C 200W Stærð 410x270x310mm Þvottakar 300x240x150mm Tími upp í 99mín SEALEY	 482 504042 Þvottakar 151 ltr m/dælu 230V REAL-PARTS HOLLAND
 482 504047 Sandblástursskápur 220 ltr 230V REAL-PARTS HOLLAND	 482 504048 Sandblástursskápur 440 ltr 230V REAL-PARTS HOLLAND
 482 504056 Sandblástursskápur 990 ltr 230V REAL-PARTS HOLLAND	 066 BGT25KG Sandblásturssandur 25kg á borð 230V REAL-PARTS HOLLAND

RAFMAGNSVERKFÆRI

RAFMAGNSVERKFÆRI

 066 SD1530 Lóðbolti 15/30V Ergonomic handle design with comfortable grip, LED indicator and three position switch. Dual wattage settings allow the user to carry out work requiring different temperatures. Fitted with high quality long life tip suitable for lead free soldering and 1.3mtr cable with BS approved 230V/13Amp plug. Features knurled collar for quick and convenient tip 230V SEALEY	 066 SD4080 Lóðbolti 40/80V Ergonomic handle design with comfortable grip, LED indicator and three position switch. Dual wattage settings allow the user to carry out work requiring different temperatures. Fitted with high quality long life tip suitable for lead free soldering and 1.3mtr cable with BS approved 230V/13Amp plug. 230V SEALEY
 066 SD300K Lóðbyssusett 8 stk 230V 100W SEALEY	 066 SD250K Lóðbolti 30/100W 230V Model No: SD250K Contents: 30/100W Dual Powered Pistol Type Soldering Gun, Soldering Wire, Solder Sucker, Metal Safety Stand with Cleaning Sponge Temperature Range: 120°C to 250°C SEALEY
 066 ST80 Lóðboltastöð PRO Model No: ST80 Supply: 230V Frequency: 50Hz Heating Element Voltage: 28V AC Temperature Stability: ±2°C (in still air, no load) Temperature Accuracy: ±10°C Temperature Range: 150-480°C(302-896°F) Tip-to-Ground Resistance: < 2Ω Tip-to-Ground Voltage: < 2mV Power: 80W 230V 80W SEALEY	 066 SDL6 Lóðbolti hlaðanlegur 3,7V Model No: SDL6 Battery: 3.7V 2.6Ah Li-Ion Power Rating: 6W Maximum Temperature: 510°C Charging Time: 3-4hr Operating Time: 90min Consumable Parts: Conical Tip; SDL6.CT, Flat Chisel Tip; SDL6.FT SEALEY

 066 HVLP3000 Sprautukanna 700W Model No: HVLP3000 Power: 700W Maximum Air Pressure: 4.35psi Voltage: 230V Spray Gun Set-Up: 2.5mm Pot Capacity: 800ml Air Hose Length: 3mtr Weight: 3kg 230V SEALEY	 066 AK2920 Límbyssá 80W 230V Model No: AK2920 Power: 80W Supply: 230V Replacement Glue Sticks: Pack Quantity: 25pc 230V 066 AK292/2 Límstautar 25 stk SEALEY
066 SMS2101 Brýni 200mm 180W Model No: SMS2101 Motor Power: 180W Supply: 230V Wheel Diameter: Ø200 x 40mm Axle Diameter: Ø12mm No Load Speed: 95rpm Weight: 11.8kg Grinding Stone: Ø200 x 40mm Leather Honing Wheel: Ø200 x 30mm Replacement Wheels: SMS2101.SW Sharpening Wheel: SMS2101.HW 230V SEALEY	 066 SMS2003 Brýni f/hjólsagarbl. 110W 230V 5300rpm 0-25° Blað 90-400mm 5kg. SEALEY
 066 BG1010 Smergel Mini 50mm Model No: BG1010 Motor Power: 100W Supply: 230V Wheel Diameter: Ø50mm No Load Speed: 3000-9000rpm Weight: 7.5kg 230V SEALEY	 066 SMS2008 Borabrýni 80W Model No: SMS2008 Motor Power: 80W - 230V Free Speed: 4200rpm Drill Bit Range: Ø3-13mm 230V SEALEY
 066 BG1010 Smergel Mini 50mm Model No: BG1010 Motor Power: 100W Supply: 230V Wheel Diameter: Ø50mm No Load Speed: 3000-9000rpm Weight: 7.5kg 230V SEALEY	 066 SM521 Smergel og brýni Model No: SM521 Motor Power: 250W Supply: 230V Wet Grinding Stone Size: Ø200mm Wet Grinding Stone Model: SM521GW200W No: 130rpm Dry Grinding Stone Size: Ø150mm Dry Grinding Stone Model: BG150/15 (Fine), BG150/16 (Coarse) Dry Grinding Speed: 2850rpm Weight: 11.7kg 230V SEALEY

066 BG150XW/99 Smergel 150mm
Heavy Duty 230V
Með vírskífu



450W
2850rpm

SEALEY

066 BG200/99 Smergel 200mm
Heavy Duty 230V



600W
2850rpm

SEALEY

066 BG150XL/96 Smergel 150mm
230V



Model No: BG150XL/96
Supplied with: 2 x Stones
Motor Power: 370W
Supply: 230V
Axle Diameter: 13mm
No Load Speed: 2850rpm
Weight: 12kg

SEALEY

066 BG150XLW/98 Smergel 150mm
230V



Model No: BG150XLW/98
Specification Table:
Supplied with: Stone, Wire Wheel
Motor Power: 370W
Supply: 230V
Axle Diameter: Ø13mm
No Load Speed: 2850rpm
Weight: 11kg

SEALEY

066 BG150XD/99 Smergel 150mm
230V



Model No: BG150XD/99
Supplied with: Stones (x2)
Motor Power: 450W
Supply: 230V
Axle Diameter: Ø13mm
No Load Speed: 2850rpm
Weight: 13kg

SEALEY

066 BG200XL Smergel 200mm
230V



Model No: BG200XL
Supplied with: 2 x Stones
Motor Power: 600W
Supply: 230V
Axle Diameter: 16mm
No Load Speed: 2850rpm
Weight: 17kg

SEALEY

066 BG150BS Smergel og slípiband
230V



Model No: BG150BS
Motor Power: 250W
Supply: 230V
Belt Size: 50 x 686mm
Belt Speed: 895mtr/min
Stone Size: 150mm
Stone Speed: 2850rpm
Table Tilt: 45°
Weight: 10kg

SEALEY

066 SM750 Slípivél
230V



Model No: SM750
Belt Size: 762 x 25mm
Belt Speed: 845mtr/min
Disc Size: 125mm
Disc Speed: 2850rpm
Table Size (W x D): 128 x 185mm
Table Tilt: 0-45°
Motor Power: 250W - 230V
Supply: 230V
Dust Extraction Ports: Ø45mm (x2)
Weight: 7kg
Replacement Sanding Belts:
Model No: Grade:
SM750B60G 60Grit
SM750B80G 80Grit
SM750B120G 120Grit
Replacement Sanding Discs:
Model No: Grade:
SM750D80G 80Grit

SEALEY

066 SM914 Slípivél með bandi
og disk.
230V



Model No: SM914
Belt Size(s): 100 x 915mm
Belt Speed: 440mtr/min
Disc Ø: Ø150mm
Disc Speed: 2850rpm
Table Size: 225 x 160mm
Table Tilt: 0-45°
Motor Power: 370W
Supply: 230V
Dust Extraction Ø: Ø63.5mm
Weight: 18.5kg
Consumable Parts:
Replacement Sanding Belts:
Model No: Grade:
SM14/B060G 60Grit
SM14/B080G 80Grit
SM14/B100G 100Grit
Replacement Sanding Disc:
Model No: Grade:
SM14/D80G 80Grit

SEALEY

066 SM1300 Slípivél með hólkum
230V



Model No: SM1300
Motor Power: 450W - 230V
No Load Speed: 2000/1750rpm
(Spindle/Belt):
Oscillations: 600pm
Belt Size: 610 x 102mm
Spindle Height: 102mm
Table Tilt: 0-45°
Table Size: 489 x 483mm
Bobbins Included: 13, 19, 25, 38, 50mm
Dust Extraction Port ID/OD: Ø36/39mm
Weight: 18kg

SEALEY

Slípihólkur fyrir slípivél SM1300



066 SM1300B13 Ø13 x 90 80 GRIT
066 SM1300B19 Ø19 x 90 80 GRIT
066 SM1300B25 Ø25 x 90 80 GRIT
066 SM1300B38 Ø38 x 90 80 GRIT
066 SM1300B50 Ø50 x 90 80 GRIT
066 SM1300B610 610X100 80 GRIT

Rafmagnsverkfæri

047 64864 Slípirokkur 125mm
1250W 230V



3M

024 SE-204 Slípivél rafmagns
MBX 23/11mm
230V



MONTI

066 SO125 Slípari 125mm
Model No: S0125 230V
Pad Size: Ø125mm
Power: 240W
Supply: 230V
No Load Speed: 12000rpm
Orbit Size: Ø3mm
Weight: 1.17kg



SEALEY

Rafmagnsverkfæri

066 SR5850 Rafmagnssög
850W 230V
Blaðlengd 150mm



SEALEY

024 SE-206-BMC Slípivél rafmagns
Sett m/bustum MBX 23/11mm
230V



MONTI

066 SD1000 Höggborvél 13mm
Model No: SD1000 230V
Capacity: 13mm
Motor Power: 1050W
Supply: 230V
No Load Speed: 0-1100/0-3000rpm
Hammer Action: 0-17600/0-48000bpm
Drilling Capacities:
Wood: 25mm
Steel: 13mm
Masonry: 16mm
Weight: 4kg



SEALEY

066 MS900PS Massavél 1300W
Model No: MS900PS 230V
Pad Size: Ø170mm
Thread Size: M14 x 2mm
No Load Speed: 1400-3000rpm
Power: 1300W
Supply: 230V
Weight: 3.8kg



SEALEY

047 64392 Massavél 1100W
230V



3M

066 MS925PS Massavél 1400W
Model No: MS925PS 230V
Pad Size: Ø180mm
Thread Size: M14 x 2mm
No Load Speed: 600-3200rpm
Power: 1400W
Supply: 230V
Weight: 3.5kg



SEALEY

066 ER230P Bónvél 230mm
Model No: ER230P 230V
Supply: 230V
Power: 110W
Speed: 3300rpm
Pad Size: Ø230mm
Cable Length: 4mtr
Replacement Backing Pad: ER230P.BPV2
Replacement Bonnet Terry: ER230P.TB
Cloth: ER230P.WB
Replacement Bonnet: ER230P.WB
Synthetic Fleece:



SEALEY

066 ER150P Bónvél 150mm
230V
60W



SEALEY

066 E5188 Slípari 230V m/barka
Model No: E5188 230V
Power - Supply: 170W - 230V
Speed Range: 8000-35000rpm Stepless
Collets: 1.5mm, 2.3mm (x2), 3.2mm
Twist Drills: 1.5mm (x2), 2.3mm (x2), 3.2mm (x2)
Mounted Points: 10pc
Diamond Tipped Engravers: 5pc
Sanding Cylinder: 6.4 x 12.7mm, 12.7 x 12.7mm



SEALEY

066 SMT300Q Fjölnota verkfæri
Model No: SMT300Q 230V
Motor Power: 300W
Supply: 230V
No Load Speed: 15000-21000rpm
Weight: 1.48kg



Cutting Blade, Scraper Blade, Sanding Discs (x4), Triangle Backing Pad

SEALEY

066 HS102K Plastviðgerðarsett
með hitabyssu
Model No: HS102K
Contents: HS102 Hot Air Gun, Plastic Welding Nozzle, Reduction Nozzle, Starter Pack of ABS Rods



SEALEY

066 HS100 Hitabyssa 2000W
Model No: HS100 230V
Power: 2000W
Supply: 230V
Temperature Range: 50/420/650°C
Airflow: 250, 400, 650ltr/min



3-Hraða

SEALEY

066 HS105 Hitabyssa 1600W
Model No: HS105 230V
Power: 1600W
Supply: 230V
Temperature Range: 375°C/500°C
Airflow: 300, 500ltr/min



SEALEY

066 HS104K Hitabyssa Deluxe
Model No: HS104K 230V
Power: 2000W
Supply: 230V
Temperature Range: 80°C/80-600°C
Airflow: 480ltr/min



SEALEY

RAFHLÖÐU-RAFMAGNSTÆKI

066 CP2144MH Skrall 3/8" 14,4V



Model No:	CP2144MH
Battery:	14.4V 2Ah Ni-MH
Drive:	3/8"Sq
Maximum Torque:	48Nm(35lb.ft)
Replacement Battery:	CP2144MHBP
Weight:	2.1kg



066 CP2144MHBP Rafhlaða fyrir skrall

RAFHLÖÐU-RAFMAGNSTÆKI

066 CP2400MH Herslulykill 1/2" 24V



Model No:	CP2400MH
Battery:	24V 2Ah Ni-MH
Drive:	1/2"Sq
No Load Speed:	0-2000rpm
Impact Rate:	0-2600bpm
Maximum Torque:	441Nm(325lb.ft)
Replacement Battery:	CP2400MHBP
Weight:	3.6kg



066 CP2400MHBP Rafhlaða fyrir lykil

066 CP36S Hleðsluskrúfjárn

Með skrúfbitum og innbyggðu vasaljósi. 53stk Lithium rafhlaða.



066 CP36MS Hleðsluskrúfjárn

Model No:	CP36MS
Battery:	3.7V 1.3Ah Li-Ion
Free Speed:	0-230rpm
Maximum Torque:	4.5Nm
Charging Time:	3-5hr

Með 14 skrúfbitum



066 CP36B Hleðsluskrúfjárn

Model No:	CP36B
Battery:	3.7V 1.3Ah Li-Ion
Free Speed:	210rpm
Maximum Torque:	3.5Nm
Charging Time:	3-5hr

Með 24 skrúfbitum.



066 RE024 Plastviðgerðarbyssa Hleðslubatterý.



Model No:	RE024
Battery:	3.7V 6600mAh Li-Ion
Charging Time:	3-4hr



066 CP6018V Borvél 18V



Model No:	CP6018V
Battery:	18V 1.5Ah Li-Ion
No Load Speed:	0-350/0-1400rpm
Impact Rate:	0-4550/16200bpm
Drilling Capacities:	
Wood:	32mm
Metal:	13mm
Concrete:	10mm
Chuck Size:	13mm
Maximum Torque:	50Nm
Replacement Battery:	CP6018VBP
Weight Including Battery:	2.4kg



066 CP18VLD Borvél 18V



Model No:	CP18VLD
Battery:	18V 1.5Ah Li-Ion
No Load Speed:	0-350/0-1250rpm
Impact Rate:	0-5250/0-19500bpm
Drilling Capacities:	
Wood:	Ø20mm
Metal:	Ø10mm
Concrete:	Ø10mm
Chuck Size:	Ø10mm
Maximum Torque:	31Nm
Replacement Battery:	CP18VLDBP
Weight Including Battery:	1.25kg



066 CP18VLDBP Rafhlaða Lithium

Model No:	CP18VLDBP
Battery:	18V 1.5Ah Li-Ion
Application(s):	CP18VLD



066 CPG18V Smursprauta 18V



Model No:	CPG18V
Battery:	18V 1.7Ah Ni-MH
Pressure:	8000psi
Flow Rate:	100g/min
Hose Length:	700mm
Replacement Battery:	CPG18VBP



066 CPG18VBP Rafhlaða 18V

Model No:	CPG18VBP
Battery Type:	18V 1.7Ah Ni-MH

Fyrir Smursprautu.



SÚLUBORVÉLAR

066 GDM140F Súluborvél á gólf 230V



Model No:	GDM140F
Drilling Capacity (Chuck Size):	16mm
Spindle Nose Taper:	MT2
Swing:	314mm
Spindle Centre to Column:	127mm
Spindle Travel:	60mm
Number of Speeds:	12
Speed Range:	210-2580rpm
Maximum Distance Spindle to Table:	780mm
Maximum Distance Spindle to Base:	1150mm
Working Table Surface Size:	Ø250mm
Working Base Surface Size:	195 x 180mm
Overall Base Size:	420 x 250mm
Column Diameter:	60mm
Collar Diameter:	60mm
Overall Height:	1530mm
Motor Power (Start):	220W (370W)
Supply:	230V
Weight:	53kg
Optional Keyless Chuck 16mm:	GDMX/KC



SÚLUBORVÉLAR

066 PDM170F Súluborvél 16 hraða 230V 1610mm



Model No:	PDM170F
Drilling Capacity (Chuck Size):	16mm
Spindle Nose Taper:	MT2
Swing:	413mm
Spindle Centre to Column:	170mm
Spindle Travel:	80mm
Number of Speeds:	16
Speed Range:	190-3000rpm
Maximum Distance Spindle to Table:	770mm
Maximum Distance Spindle to Base:	1255mm
Working Table Surface Size:	254 x 254mm
Working Base Surface Size:	205 x 200mm
Overall Base Size:	450 x 270mm
Column Diameter:	Ø73mm
Collar Diameter:	Ø55mm
Overall Height:	1610mm
Motor Power:	370W(550W)
Supply:	230V
Weight:	58kg
Optional Keyless Chuck 16mm:	PDM/KC
Integral Work Light (Bulb not included):	No



066 PH250 Víratálía 125/250kg 230V



Model No:	PH250
Capacity (single cable):	125kg
Capacity (double cable):	250kg
Lift Height (single cable):	12mtr
Lift Height (double cable):	6mtr
Lift Speed (Maximum):	8mtr/min
Power - Supply:	500W - 230V
Weight:	12.5kg



066 PH400 Víratálía 200/400kg 230V



Model No:	PH400
Capacity (single cable):	200kg
Capacity (double cable):	400kg
Lift Height (single cable):	12mtr
Lift Height (double cable):	6mtr
Lift Speed (Maximum):	8mtr/min
Power - Supply:	750W - 230V
Weight:	16kg



066 E541 Merkipenni 230V



Model No:	E541
Power - Supply:	13W - 230V
Speed:	6000rpm
Tungsten Carbide Tipped Engraving Heads:	1.8mm
Accessories:	Tungsten Carbide Tipped Engraving Head, Letter Template, Number Template



066 CP2812VCOMBO Slípi og bónsett míni 10,8V

Model No. - Description
CP2812V - Cordless Mini Sander/Polisher Kit 10.8V
SCS701 - Cutting Compound Medium 500ml
SCS702 - Super Polymer Polish 500ml



LOFTPRSSUR

066 SAC00615 Loftpressa 6ltr 230V



Model No:	SAC00615
Motor Output:	1.5hp
Voltage/Phase:	230V - 1ph
Minimum Rated Supply:	13A
Air Displacement	6.35(180)
cfm(ltr/min):	
Maximum Free Air Delivery	4.7(130)
cfm(ltr/min):	
Maximum Pressure:	116psi(8bar)
Receiver Capacity:	6ltr
Outlet Fitting:	Quick Release Coupling
Dimensions (W x D x H):	480 x 180 x 490mm
Weight:	10kg



LOFTPRESSUR

066 SA5020 Loftpressa 50ltr 230V



Model No:	SA5020
Motor Output:	2hp
Voltage/Phase:	230V - 1ph
Minimum Rated Supply:	13A
Air Displacement	7(200)
cfm(ltr/min):	
Maximum Free Air Delivery	4.8(135)
cfm(ltr/min):	
Maximum Pressure:	116psi(8bar)
Receiver Capacity:	50ltr
Outlet Fitting:	Quick Release Coupling
Dimensions (W x D x H):	740 x 400 x 590mm
Weight:	30kg



066 SAC05030 Loftpressa 50ltr 230V



Model No:	SAC05030
Motor Output:	3hp
Voltage/Phase:	230V - 1ph
Minimum Rated Supply:	13A
Air Displacement	12.6(357)
cfm(ltr/min):	
Maximum Free Air Delivery	8.75(248)
cfm(ltr/min):	
Maximum Pressure:	130psi(9bar)
Receiver Capacity:	50ltr
Outlet Fitting:	Quick Release Coupling
Dimensions (W x D x H):	810 x 420 x 620mm
Weight:	37kg



066 PEH2001 Hitablásari 2000W 13A 230V



Tvær stillingar
1000W og 2000W
Hitar 40m³
Hitastillir og vifta líka.



066 PEH3001 Hitablásari 3000W 16A 230V



Tvær stillingar
1500W og 3000W
Hitar 60m³
Hitastillir og vifta líka.



066 FH2010 Hitablásari 2000W 230V



Tvær stillingar
1000W og 2000W
Hitastillir og vifta líka.



066 ADB300 Blásari 230V



Model No:	ADB300
Speeds:	1275rpm
Maximum Airflow:	10mtr ² /min (356cfm)
Power:	96W
Supply:	230V
Current:	0.5A
Weight:	3.7kg



RAFMAGNSSPIL 12V

066 SRW4300 Spil 12V 4300kg



Model No:	SRW4300
Voltage:	12V
Line Pull*:	4300kg
Motor Power:	1.9kW
Gear Ratio:	196.6:1
Line Speed*:	
No Load:	4.3mtr/min
Maximum Load:	1.6mtr/min
Current Draw:	
No Load:	90A
Maximum Load:	420A
Cable Ø:	9.2mm
Cable Length:	26mtr
Weight:	41.8kg
Replacement Wire Rope:	SRW5450.WR
Dyneema Rope:	SRW5450.DR
Note:	*Performance quoted at first layer of cable on drum



066 TP6818 Olútunnudæla



Model No:	TP6818
Voltage:	12/230V
Current:	0.4/0.6A
Power:	23W
Duty Cycle:	30min/hr
Flow Rate:	19ltr/min
Fuse:	5A

SEALEY

066 SAC41 Lofthitari og kællir

Model No:	SAC41
Cooler:	70W
Heater:	1000/2000W
Supply:	230V
Anion Density:	2million/cm ³
Maximum Airflow:	350mtr ³ /hr
Cooling Water Tank:	8ltr
Weight:	8kg



SEALEY

066 PM120L Hræra rafmagns. 120 ltr

Model No:	PM120L
Motor Power:	1400W
Supply:	230V
No Load Speed:	0-800rpm
Mixing Capacity:	120ltr
Paddle Size:	Ø140mm
Thread:	M14
Weight:	7.5kg



SEALEY

066 VSCANP Bilanagreinir SÉRPÖNTUN

Model No:	VSCANP
Specification Table:	
Central Processing Unit (CPU):	Intel Quad-Core Processor 1.86GHz
Operating System:	Android 4.4
Hard Drive:	32GB
Touch Screen Display:	8" 1280x800
Wi-Fi:	Yes
Wireless VCI:	Yes
Internal Battery:	3.7V 8500mAh Li-Poly
Weight:	0.70kg
Camera (rear):	5.0 Megapixel
Camera (front):	2.0 Megapixel
Boot-Up Time:	25 Seconds
Auto VIN Recognition:	Some
Subscription Based On-Line Updates:	Yes



SEALEY

